

Contagion

Last updated: 2019/01/14, 22:50:59

Complex Networks | @networksvox
CSYS/MATH 303, Spring, 2019

Prof. Peter Dodds | @peterdodds

Dept. of Mathematics & Statistics | Vermont Complex Systems Center
Vermont Advanced Computing Core | University of Vermont



Licensed under the Creative Commons Attribution-NonCommercial-ShareAlike 3.0 License.


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models

Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



1 of 88

Outline

Basic Contagion Models

Global spreading condition

Social Contagion Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References

CocoNuTS
@networksvox
Contagion


Basic Contagion Models

Global spreading condition

Social Contagion Models

Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



4 of 88

These slides are brought to you by:



CocoNuTS
@networksvox
Contagion


Basic Contagion Models

Global spreading condition

Social Contagion Models

Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



2 of 88

Contagion models

Some large questions concerning network contagion:

1. For a given spreading mechanism on a given network, what's the probability that there will be global spreading?
2. If spreading does take off, how far will it go?
3. How do the details of the network affect the outcome?
4. How do the details of the spreading mechanism affect the outcome?
5. What if the seed is one or many nodes?

Next up: We'll look at some fundamental kinds of spreading on generalized random networks.

CocoNuTS
@networksvox
Contagion


Basic Contagion Models

Global spreading condition

Social Contagion Models

Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size


References



11 of 88

These slides are also brought to you by:

Special Guest Executive Producer



On Instagram at [pratchett_the_cat](https://www.instagram.com/pratchett_the_cat)

CocoNuTS
@networksvox
Contagion


Basic Contagion Models

Global spreading condition

Social Contagion Models


Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



3 of 88

Spreading mechanisms



■ uninfected
■ infected

General spreading mechanism: State of node i depends on history of i and i 's neighbors' states.

Doses of entity may be stochastic and history-dependent.

May have multiple, interacting entities spreading at once.

CocoNuTS
@networksvox
Contagion


Basic Contagion Models

Global spreading condition

Social Contagion Models

Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References




12 of 88


Spreading on Random Networks

- For random networks, we know local structure is pure branching.
- Successful spreading is \therefore contingent on **single edges** infecting nodes.

Success



Failure:




- Focus on **binary** case with edges and nodes either infected or not.
- First big question:** for a given network and contagion process, can global spreading from a single seed occur?

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



13 of 88

Global spreading condition

- Case 2:** If $B_{k1} = \beta < 1$ then

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot \beta > 1.$$

- A fraction $(1-\beta)$ of edges do not transmit infection.
- Analogous phase transition to giant component case but **critical value** of $\langle k \rangle$ is **increased**.
- Aka **bond percolation**.
- Resulting degree distribution \tilde{P}_k :

$$\tilde{P}_k = \beta^k \sum_{i=k}^{\infty} \binom{i}{k} (1-\beta)^{i-k} P_i.$$


Insert question from assignment 9

- We can show $F_{\tilde{P}}(x) = F_P(\beta x + 1 - \beta)$.

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



16 of 88

Global spreading condition


- We need to find: [5]
- R = the average # of infected edges that one random infected edge brings about.
- Call R the **gain ratio**.
- Define B_{k1} as the probability that a node of degree k is infected by a single infected edge.

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot \underbrace{(k-1)}_{\substack{\# \text{ outgoing} \\ \text{infected} \\ \text{edges}}} \cdot \underbrace{B_{k1}}_{\substack{\text{Prob. of} \\ \text{infection}}} + \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot \underbrace{0}_{\substack{\# \text{ outgoing} \\ \text{infected} \\ \text{edges}}} \cdot \underbrace{(1-B_{k1})}_{\substack{\text{Prob. of} \\ \text{no infection}}}$$

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



14 of 88


Global spreading condition

- Cases 3, 4, 5, ...:** Now allow B_{k1} to depend on k
- Asymmetry:** Transmission along an edge depends on node's degree at other end.
- Possibility: B_{k1} increases with k ... **unlikely**.
- Possibility: B_{k1} is not monotonic in k ... **unlikely**.
- Possibility: B_{k1} decreases with k ... **hmmm**.
- $B_{k1} \searrow$ is a plausible representation of a simple kind of social contagion.
- The story:** More well connected people are harder to influence.

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



17 of 88

Global spreading condition

- Our global spreading condition is then:

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} > 1.$$

- Case 1:** If $B_{k1} = 1$ then


$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) = \frac{\langle k(k-1) \rangle}{\langle k \rangle} > 1.$$

- Good:** This is just our giant component condition again.

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



15 of 88

Global spreading condition

- Example:** $B_{k1} = 1/k$.


$$R = \sum_{k=1}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} = \sum_{k=1}^{\infty} (k-1) \cdot \frac{kP_k}{\langle k \rangle} \cdot \frac{1}{k} = \sum_{k=1}^{\infty} \frac{P_k}{\langle k \rangle} \cdot (k-1) = 1 - \frac{1-P_0}{\langle k \rangle}$$

- Since R is always less than 1, no spreading can occur for this mechanism.
- Decay of B_{k1} is too fast.
- Result is independent of degree distribution.

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



18 of 88

Global spreading condition

- Example: $B_{k1} = H(\frac{1}{k} - \phi)$ where $0 < \phi \leq 1$ is a **threshold** and H is the Heaviside function.
- Infection only occurs for nodes with **low degree**.
- Call these nodes **vulnerables**: they flip when **only one** of their friends flips.


$$R = \sum_{k=1}^{\infty} \frac{kP_k}{\langle k \rangle} \bullet (k-1) \bullet B_{k1} = \sum_{k=1}^{\infty} \frac{kP_k}{\langle k \rangle} \bullet (k-1) \bullet H\left(\frac{1}{k} - \phi\right)$$

$$= \sum_{k=1}^{\lfloor \frac{1}{\phi} \rfloor} (k-1) \bullet \frac{kP_k}{\langle k \rangle} \quad \text{where } \lfloor \cdot \rfloor \text{ means floor.}$$

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



19 of 88

Global spreading condition

- The uniform threshold model global spreading condition:


$$R = \sum_{k=1}^{\lfloor \frac{1}{\phi} \rfloor} (k-1) \bullet \frac{kP_k}{\langle k \rangle} > 1.$$

- As $\phi \rightarrow 1$, all nodes become resilient and $r \rightarrow 0$.
- As $\phi \rightarrow 0$, all nodes become vulnerable and the contagion condition matches up with the giant component condition.
- Key:** If we fix ϕ and then vary $\langle k \rangle$, we may see **two** phase transitions.
- Added to our standard giant component transition, we will see a cut off in spreading as nodes become more connected.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



20 of 88

Social Contagion


Some important models (recap from CSYS 300)

- Tipping models—Schelling (1971)^[11, 12, 13]
 - Simulation on checker boards.
 - Idea of thresholds.
- Threshold models—Granovetter (1978)^[8]
- Herding models—Bikhchandani et al. (1992)^[1, 2]
 - Social learning theory, Informational cascades,...

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



23 of 88

Threshold model on a network

Original work:




"A simple model of global cascades on random networks"^[7]
Duncan J. Watts,
Proc. Natl. Acad. Sci., **99**, 5766–5771,
2002.^[15]

- Mean field Granovetter model \rightarrow network model
- Individuals now have a limited view of the world

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



24 of 88


Virtual contagion: Corrupted Blood^[9], a 2005 virtual plague in World of Warcraft:



CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



21 of 88


Threshold model on a network

- Interactions between individuals now represented by a network
- Network is **sparse**
- Individual i has k_i contacts
- Influence on each link is **reciprocal** and of **unit weight**
- Each individual i has a fixed threshold ϕ_i
- Individuals repeatedly poll contacts on network
- Synchronous, discrete time updating
- Individual i becomes active when number of active contacts $a_i \geq \phi_i k_i$
- Activation is permanent (SI)

CocoNuTS
@networksvox
Contagion


Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



25 of 88


Threshold model on a network

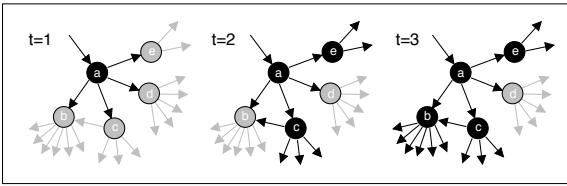

All nodes have threshold $\phi = 0.2$.


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



IV 26 of 88

Global spreading events on random networks [15]




$z = \langle k \rangle$

- Top curve: final fraction infected if successful.
 - Middle curve: chance of starting a global spreading event (cascade).
 - Bottom curve: fractional size of vulnerable subcomponent. [15]
- Global spreading events occur only if size of vulnerable subcomponent > 0 .
 - System is robust-yet-fragile just below upper boundary [3, 4, 14]
 - 'Ignorance' facilitates spreading.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



IV 29 of 88

The most gullible


Vulnerables:

- Recall definition: individuals who can be activated by just one contact being active are **vulnerables**.
- The vulnerability condition for node i : $1/k_i \geq \phi_i$.
- Means # contacts $k_i \leq \lfloor 1/\phi_i \rfloor$.
- Key:** For global spreading events (cascades) on random networks, must have a **global component of vulnerables** [15]
- For a uniform threshold ϕ , our global spreading condition tells us when such a component exists:

$$R = \sum_{k=1}^{\lfloor \frac{1}{\phi} \rfloor} \frac{k P_k}{\langle k \rangle} \cdot (k-1) > 1.$$


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




IV 27 of 88

Cascades on random networks




Above lower phase transition



Just below upper phase transition


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



IV 30 of 88

Example random network structure:




- Ω_{crit} = critical mass = global vulnerable component
- Ω_{trig} = triggering component
- Ω_{final} = potential extent of spread
- Ω = entire network

$$\Omega_{crit} \subset \Omega_{trig}; \Omega_{crit} \subset \Omega_{final}; \text{ and } \Omega_{trig}, \Omega_{final} \subset \Omega.$$


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



IV 28 of 88

Cascades on random networks




(n.b., $z = \langle k \rangle$)

- Time taken for cascade to spread through network. [15]
- Two phase transitions.
- Largest vulnerable component = **critical mass**.
- Now have endogenous mechanism for spreading from an individual to the critical mass and then beyond.


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



IV 31 of 88

Cascade window for random networks



(n.b., $z = \langle k \rangle$)

🧠 Outline of cascade window for random networks.


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks

Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



🔍 32 of 88

Social Sciences—Threshold models

🧠 At time $t + 1$, fraction rioting = fraction with

$$\phi_* \leq \phi_t.$$

🧠

$$\phi_{t+1} = \int_0^{\phi_t} f(\phi_*) d\phi_* = F(\phi_*)|_0^{\phi_t} = F(\phi_t)$$

🧠 \Rightarrow Iterative maps of the unit interval $[0, 1]$.


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks


Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



🔍 36 of 88

Cascade window for random networks

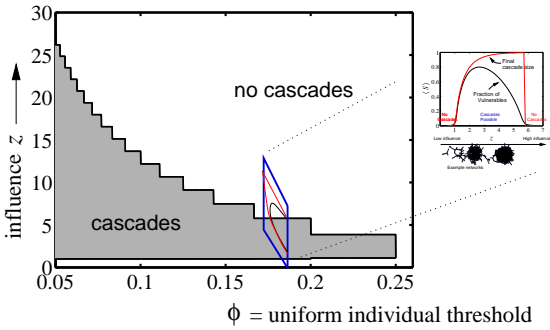


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks

Theory
Spreading possibility
Spreading probability
Physical explanation
Final size


References



🔍 33 of 88

Social Sciences—Threshold models

Action based on perceived behavior of others.

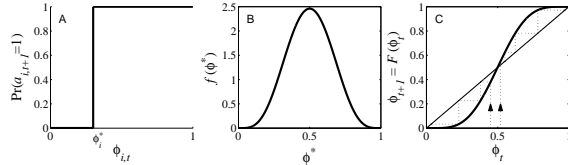

🧠 Two states: S and I

🧠 Recover now possible (SIS)

🧠 ϕ = fraction of contacts 'on' (e.g., rioting)

🧠 Discrete time, synchronous update (strong assumption!)

🧠 This is a **Critical mass model**


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks

Theory
Spreading possibility
Spreading probability
Physical explanation
Final size


References



🔍 37 of 88

Social Contagion

Granovetter's Threshold model—recap



🧠 Assumes deterministic response functions

🧠 ϕ_* = threshold of an individual.

🧠 $f(\phi_*)$ = distribution of thresholds in a population.

🧠 $F(\phi_*)$ = cumulative distribution = $\int_{\phi'_*=0}^{\phi_*} f(\phi'_*) d\phi'_*$

🧠 ϕ_t = fraction of people 'rioting' at time step t .


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks


Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



🔍 35 of 88

Social Sciences—Threshold models

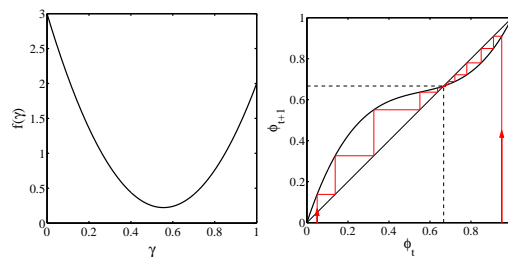

🧠 Example of single stable state model


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition

Social Contagion Models
Network version
All-to-all networks

Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



🔍 38 of 88

Social Sciences—Threshold models

Implications for collective action theory:


1. Collective uniformity \Rightarrow individual uniformity
2. Small individual changes \Rightarrow large global changes

Next:

- Connect mean-field model to network model.
- Single seed for network model: $1/N \rightarrow 0$.
- Comparison between network and mean-field model sensible for vanishing seed size for the latter.


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



39 of 88

Example random network structure:




- $\Omega_{crit} = \Omega_{vuln} =$ critical mass = global vulnerable component
- $\Omega_{trig} =$ triggering component
- $\Omega_{final} =$ potential extent of spread
- $\Omega =$ entire network

$$\Omega_{crit} \subset \Omega_{trig}; \Omega_{crit} \subset \Omega_{final}; \text{ and } \Omega_{trig}; \Omega_{final} \subset \Omega.$$


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




43 of 88

All-to-all versus random networks

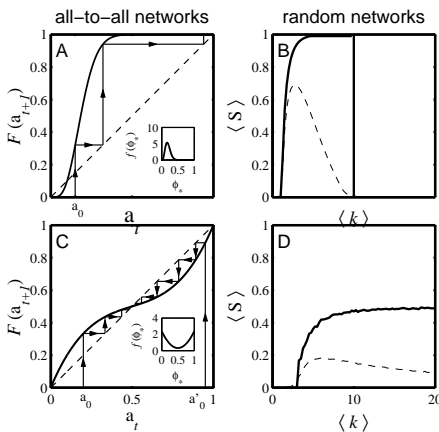

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



40 of 88


Threshold contagion on random networks

- First goal:** Find the largest component of vulnerable nodes.
- Recall that for finding the giant component's size, we had to solve:
 $F_{\pi}(x) = xF_P(F_{\rho}(x))$ and $F_{\rho}(x) = xF_R(F_{\rho}(x))$
- We'll find a similar result for the subset of nodes that are vulnerable.
- This is a node-based percolation problem.
- For a general monotonic threshold distribution $f(\phi)$, a degree k node is vulnerable with probability

$$B_{k1} = \int_0^{1/k} f(\phi) d\phi.$$

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



45 of 88


Threshold contagion on random networks

Three key pieces to describe analytically:

1. The fractional size of the largest subcomponent of vulnerable nodes, S_{vuln} .
2. The chance of starting a global spreading event, $P_{trig} = S_{trig}$.
3. The expected final size of any successful spread, S .
n.b., the distribution of S is almost always bimodal.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



42 of 88

Threshold contagion on random networks

- We now have a generating function for the probability that a randomly chosen node is vulnerable and has degree k :

$$F_P^{(vuln)}(x) = \sum_{k=0}^{\infty} P_k B_{k1} x^k.$$

- The generating function for friends-of-friends distribution is similar to before:


$$F_R^{(vuln)}(x) = \sum_{k=0}^{\infty} \frac{k P_k}{\langle k \rangle} B_{k1} x^{k-1}$$

$$= \frac{\frac{d}{dx} F_P^{(vuln)}(x)}{\frac{d}{dx} F_P(x)|_{x=1}} = \frac{\frac{d}{dx} F_P^{(vuln)}(x)}{F_R(1)}$$

- Detail: We still have the underlying degree distribution involved in the denominator.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



46 of 88

Threshold contagion on random networks

- Functional relations for component size g.f.'s are almost the same ...

$$F_{\pi}^{(\text{vuln})}(x) = \underbrace{1 - F_P^{(\text{vuln})}(1)}_{\substack{\text{central node} \\ \text{is not} \\ \text{vulnerable}}} + x F_P^{(\text{vuln})}(F_{\rho}^{(\text{vuln})}(x))$$

$$F_{\rho}^{(\text{vuln})}(x) = \underbrace{1 - F_R^{(\text{vuln})}(1)}_{\substack{\text{first node} \\ \text{is not} \\ \text{vulnerable}}} + x F_R^{(\text{vuln})}(F_{\rho}^{(\text{vuln})}(x))$$

- Can now solve as before to find

$$S_{\text{vuln}} = 1 - F_{\pi}^{(\text{vuln})}(1).$$

CocoNuTS
@networksvox
Contagion

Basic Contagion
Models

Global spreading
condition


Social Contagion
Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References



47 of 88

Probability an infected edge leads to a global spreading event:

- Q_{trig} must satisfy a one-step recursion relation.

- Follow an infected edge and use three pieces:

- Probability of reaching a degree k node is $Q_k = \frac{k P_k}{\langle k \rangle}$.
- The node reached is vulnerable with probability B_{k1} .
- At least one of the node's outgoing edges leads to a global spreading event = $1 - \text{probability no edges do so} = 1 - (1 - Q_{\text{trig}})^{k-1}$.

- Put everything together and solve for Q_{trig} :

$$Q_{\text{trig}} = \sum_k \frac{k P_k}{\langle k \rangle} \cdot B_{k1} \cdot [1 - (1 - Q_{\text{trig}})^{k-1}].$$

CocoNuTS
@networksvox
Contagion

Basic Contagion
Models

Global spreading
condition


Social Contagion
Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References



52 of 88

Threshold contagion on random networks

- Second goal:** Find probability of triggering largest vulnerable component.

- Assumption is **first node** is randomly chosen.

- Same set up as for vulnerable component except now we don't care if the initial node is vulnerable or not:

$$F_{\pi}^{(\text{trig})}(x) = x F_P^{(\text{vuln})}(F_{\rho}^{(\text{vuln})}(x))$$

$$F_{\rho}^{(\text{vuln})}(x) = 1 - F_R^{(\text{vuln})}(1) + x F_R^{(\text{vuln})}(F_{\rho}^{(\text{vuln})}(x))$$

- Solve as before to find $P_{\text{trig}} = S_{\text{trig}} = 1 - F_{\pi}^{(\text{trig})}(1)$.

CocoNuTS
@networksvox
Contagion

Basic Contagion
Models

Global spreading
condition


Social Contagion
Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References



49 of 88

Good things about our equation for Q_{trig} :

$$Q_{\text{trig}} = \sum_k \frac{k P_k}{\langle k \rangle} \cdot B_{k1} \cdot [1 - (1 - Q_{\text{trig}})^{k-1}] = f(Q_{\text{trig}}; P_k, B_{k1})$$

- $Q_{\text{trig}} = 0$ is always a solution.

- Spreading occurs if a second solution exists for which $0 < Q_{\text{trig}} \leq 1$.

- Given P_k and B_{k1} , we can use any kind of root finder to solve for Q_{trig} , but ...

- The function f increases monotonically with Q_{trig} .

- We can therefore use an iterative cobwebbing approach to find the solution:

$$Q_{\text{trig}}^{(n+1)} = f(Q_{\text{trig}}^{(n)}; P_k, B_{k1}).$$

- Start with a suitably small seed $Q_{\text{trig}}^{(1)} > 0$ and iterate while rubbing hands together.

CocoNuTS
@networksvox
Contagion

Basic Contagion
Models

Global spreading
condition


Social Contagion
Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References



53 of 88

Physical derivation of possibility and probability of global spreading:

- Possibility: binary indicator of phase. Global spreading events are either possible or can never happen.

- For random networks, global spreading possibility is understood as meaning a giant component of vulnerable nodes exists.

- Next: what's the probability that a randomly infected node will cause a global spreading event?

- Call this P_{trig} .

- As usual, it's all about edges and we need to first determine the probability that an infected edge leads to a global spreading event.

- Call this Q_{trig} .

- Later: Generalize to more complex networks involving assortativity of all kinds.

CocoNuTS
@networksvox
Contagion

Basic Contagion
Models

Global spreading
condition


Social Contagion
Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References



51 of 88

- Global spreading is possible if the fractional size S_{vuln} of the largest component of vulnerables is "giant".

- Interpret S_{vuln} as the probability a randomly chosen node is vulnerable and that infecting it leads to a global spreading event:

$$S_{\text{vuln}} = \sum_k P_k \cdot B_{k1} \cdot [1 - (1 - Q_{\text{trig}})^k] > 0.$$

- Amounts to having $Q_{\text{trig}} > 0$.

- Probability of global spreading differs only in that we don't care if the initial seed is vulnerable or not:

$$P_{\text{trig}} = S_{\text{trig}} = \sum_k P_k \cdot [1 - (1 - Q_{\text{trig}})^k]$$

- As for S_{vuln} , P_{trig} is non-zero when $Q_{\text{trig}} > 0$.

CocoNuTS
@networksvox
Contagion

Basic Contagion
Models

Global spreading
condition


Social Contagion
Models

Network version
All-to-all networks

Theory

Spreading possibility
Spreading probability
Physical explanation
Final size

References



54 of 88

Connection to generating function results:

- We found that $F_\rho^{(\text{vuln})}(1)$ —the probability that a random edge leads to a finite vulnerable component—satisfies

$$F_\rho^{(\text{vuln})}(1) = 1 - F_R^{(\text{vuln})}(1) + 1 \cdot F_R^{(\text{vuln})}(F_\rho^{(\text{vuln})}(1)).$$

- We set $F_\rho^{(\text{vuln})}(1) = 1 - Q_{\text{trig}}$ and deploy

$$F_R^{(\text{vuln})}(x) = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} B_{k1} x^{k-1} \text{ to find}$$


$$1 - Q_{\text{trig}} = 1 - \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} B_{k1} + \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} B_{k1} (1 - Q_{\text{trig}})^{k-1}.$$

- Some breathless algebra it all matches:

$$Q_{\text{trig}} = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot B_{k1} \cdot [1 - (1 - Q_{\text{trig}})^{k-1}].$$

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



↻ 55 of 88

Connection to simple gain ratio argument:

- Earlier, we showed the global spreading condition follows from the gain ratio $\mathbf{R} > 1$:

$$\mathbf{R} = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} > 1.$$

- We would very much like to see that $\mathbf{R} > 1$ matches up with $Q_{\text{trig}} > 0$.

- It really would be just so totally awesome.

- Must come from our basic edge triggering probability equation:


$$Q_{\text{trig}} = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot B_{k1} \cdot [1 - (1 - Q_{\text{trig}})^{k-1}].$$

- When does this equation have a solution $0 < Q_{\text{trig}} \leq 1$?

- We need to find out what happens as $Q_{\text{trig}} \rightarrow 0$.^[9]

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



↻ 58 of 88

Fractional size of the largest vulnerable component:

- The generating function approach gave $S_{\text{vuln}} = 1 - F_\pi^{(\text{vuln})}(1)$ where

$$F_\pi^{(\text{vuln})}(1) = 1 - F_P^{(\text{vuln})}(1) + 1 \cdot F_P^{(\text{vuln})}(F_\rho^{(\text{vuln})}(1)).$$

- Again using $F_\rho^{(\text{vuln})}(1) = 1 - Q_{\text{trig}}$ along with

$$F_P^{(\text{vuln})}(x) = \sum_{k=0}^{\infty} P_k B_{k1} x^k, \text{ we have:}$$


$$1 - S_{\text{vuln}} = 1 - \sum_{k=0}^{\infty} P_k B_{k1} + \sum_{k=0}^{\infty} P_k B_{k1} (1 - Q_{\text{trig}})^k.$$

- Excited scrabbling about gives us, as before:

$$S_{\text{vuln}} = \sum_{k=0}^{\infty} P_k B_{k1} [1 - (1 - Q_{\text{trig}})^k].$$


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




↻ 56 of 88

What we're doing:

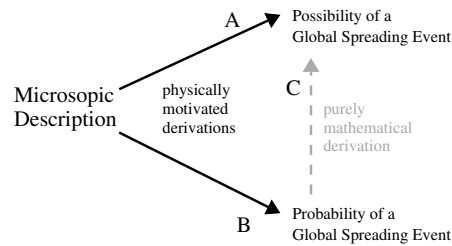

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



↻ 59 of 88

Triggering probability for single-seed global spreading events:

- Slight adjustment to the vulnerable component calculation.

- $S_{\text{trig}} = 1 - F_\pi^{(\text{trig})}(1)$ where

$$F_\pi^{(\text{trig})}(1) = 1 \cdot F_P(F_\rho^{(\text{vuln})}(1)).$$

- We play these cards: $F_\rho^{(\text{vuln})}(1) = 1 - Q_{\text{trig}}$ and

$$F_P(x) = \sum_{k=0}^{\infty} P_k x^k \text{ to arrive at}$$


$$1 - S_{\text{trig}} = 1 + \sum_{k=0}^{\infty} P_k (1 - Q_{\text{trig}})^k.$$

- More scruffing around brings happiness:

$$S_{\text{trig}} = \sum_{k=0}^{\infty} P_k [1 - (1 - Q_{\text{trig}})^k].$$

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



↻ 57 of 88

- For $Q_{\text{trig}} \rightarrow 0^+$, equation tends towards

$$Q_{\text{trig}} = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot B_{k1} \cdot [\lambda + (\lambda + (k-1)Q_{\text{trig}} + \dots)]$$

$$\Rightarrow Q_{\text{trig}} = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot B_{k1} \cdot (k-1)Q_{\text{trig}}$$


$$\Rightarrow 1 = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1}$$

- Only defines the phase transition points (i.e., $\mathbf{R} = 1$).

- Inequality?

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



↻ 60 of 88

Again take $Q_{\text{trig}} \rightarrow 0^+$, but keep next higher order term:

$$Q_{\text{trig}} = \sum_k \frac{kP_k}{\langle k \rangle} \cdot B_{k1} \cdot \left[\lambda + \left(\lambda + (k-1)Q_{\text{trig}} - \binom{k-1}{2} Q_{\text{trig}}^2 \right) \right]$$

$$\Rightarrow Q_{\text{trig}} = \sum_k \frac{kP_k}{\langle k \rangle} \cdot B_{k1} \cdot \left[(k-1)Q_{\text{trig}} - \binom{k-1}{2} Q_{\text{trig}}^2 \right]$$

$$\Rightarrow \sum_k \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} = 1 + \sum_k \frac{kP_k}{\langle k \rangle} B_{k1} \binom{k-1}{2} Q_{\text{trig}}$$

We have $Q_{\text{trig}} > 0$ if $\sum_k \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} > 1$.

Repeat: Above is a mathematical connection between two physically derived equations.

From this connection, we don't know anything about a gain ratio R or how to arrange the pieces.

Threshold contagion on random networks

Third goal: Find expected fractional size of spread.

Not obvious even for uniform threshold problem.

Difficulty is in figuring out if and when nodes that need ≥ 2 hits switch on.


Problem solved for infinite seed case by Gleeson and Cahalane:

"Seed size strongly affects cascades on random networks," Phys. Rev. E, 2007. [7]

Developed further by Gleeson in "Cascades on correlated and modular random networks," Phys. Rev. E, 2008. [6]

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



63 of 88

Expected size of spread

Idea:

Randomly turn on a fraction ϕ_0 of nodes at time $t = 0$


Capitalize on local branching network structure of random networks (again)

Now think about what must happen for a specific node i to become active at time t :

- $t = 0$: i is one of the seeds (prob = ϕ_0)
- $t = 1$: i was not a seed but enough of i 's friends switched on at time $t = 0$ so that i 's threshold is now exceeded.
- $t = 2$: enough of i 's friends and friends-of-friends switched on at time $t = 0$ so that i 's threshold is now exceeded.
- $t = n$: enough nodes within n hops of i switched on at $t = 0$ and their effects have propagated to reach i .

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




65 of 88

Expected size of spread


● = active, $\phi = 1/3$

$t=0$

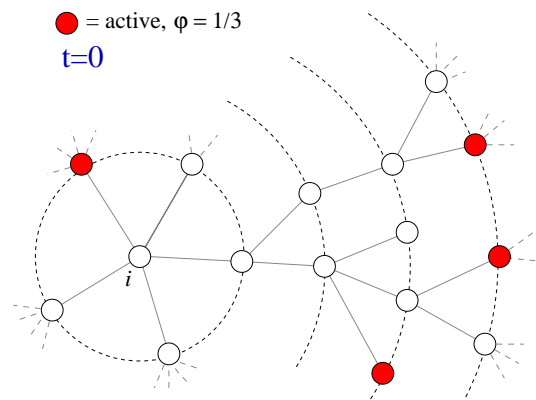

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



66 of 88


Meme species:

| Periodic Table of Advice Animals | | | | | | | | | | |
|----------------------------------|---|---|---|---|---|---|---|---|---|---|
| Group | A | B | C | D | E | F | G | H | I | J |
| 1 | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | | | | | | | | | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |

More here at <http://knowyourmeme.com>


COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



64 of 88


Expected size of spread

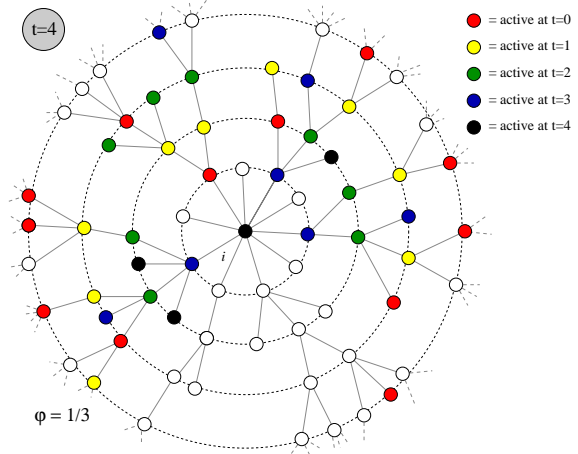

$\phi = 1/3$

COcoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



67 of 88


Expected size of spread

Notes:

- Calculations presume nodes do not become inactive (strong restriction, liftable)
- Not just for threshold model—works for a wide range of contagion processes.
- We can analytically determine the entire time evolution, not just the final size.
- We can in fact determine $\Pr(\text{node of degree } k \text{ switches on at time } t)$.
- Even more, we can compute: $\Pr(\text{specific node } i \text{ switches on at time } t)$.
- Asynchronous updating can be handled too.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



68 of 88

Expected size of spread

- For general t , we need to know the probability an edge coming into a degree k node at time t is active.
- Notation:** call this probability θ_t .
- We already know $\theta_0 = \phi_0$.
- Story analogous to $t = 1$ case. For specific node i :

$$\phi_{i,t+1} = \phi_0 + (1 - \phi_0) \sum_{j=0}^{k_i} \binom{k_i}{j} \theta_t^j (1 - \theta_t)^{k_i - j} B_{k_i j}$$


- Average over all nodes with degree k to obtain expression for ϕ_{t+1} :

$$\phi_{t+1} = \phi_0 + (1 - \phi_0) \sum_{k=0}^{\infty} P_k \sum_{j=0}^k \binom{k}{j} \theta_t^j (1 - \theta_t)^{k-j} B_{k j}$$

- So we need to compute $\theta_t \dots$ massive excitement...

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




71 of 88

Expected size of spread


Pleasantness:

- Taking off from a single seed story is about **expansion** away from a node.
- Extent of spreading story is about **contraction** at a node.

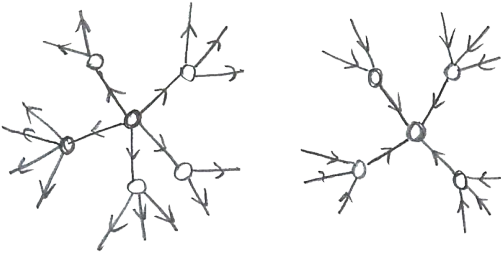

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



69 of 88

Expected size of spread

First connect θ_0 to θ_1 :


$$\theta_1 = \phi_0 +$$

$$(1 - \phi_0) \sum_{k=1}^{\infty} \frac{k P_k}{\langle k \rangle} \sum_{j=0}^{k-1} \binom{k-1}{j} \theta_0^j (1 - \theta_0)^{k-1-j} B_{k j}$$

- $\frac{k P_k}{\langle k \rangle} = Q_k = \Pr(\text{edge connects to a degree } k \text{ node})$.
- $\sum_{j=0}^{k-1}$ piece gives $\Pr(\text{degree node } k \text{ activates if } j \text{ of its } k-1 \text{ incoming neighbors are active})$.
- ϕ_0 and $(1 - \phi_0)$ terms account for state of node at time $t = 0$.
- See this all generalizes to give θ_{t+1} in terms of $\theta_t \dots$

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



72 of 88


Expected size of spread

- Notation:** $\phi_{k,t} = \Pr(\text{a degree } k \text{ node is active at time } t)$.
- Notation:** $B_{k j} = \Pr(\text{a degree } k \text{ node becomes active if } j \text{ neighbors are active})$.
- Our starting point: $\phi_{k,0} = \phi_0$.
- $\binom{k}{j} \phi_0^j (1 - \phi_0)^{k-j} = \Pr(j \text{ of a degree } k \text{ node's neighbors were seeded at time } t = 0)$.
- Probability a degree k node was a seed at $t = 0$ is ϕ_0 (as above).
- Probability a degree k node was not a seed at $t = 0$ is $(1 - \phi_0)$.
- Combining everything, we have:

$$\phi_{k,1} = \phi_0 + (1 - \phi_0) \sum_{j=0}^k \binom{k}{j} \phi_0^j (1 - \phi_0)^{k-j} B_{k j}$$

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



70 of 88

Expected size of spread

Two pieces: edges first, and then nodes

$$1. \theta_{t+1} = \underbrace{\phi_0}_{\text{exogenous}}$$

$$+ (1 - \phi_0) \sum_{k=1}^{\infty} \frac{k P_k}{\langle k \rangle} \sum_{j=0}^{k-1} \binom{k-1}{j} \theta_t^j (1 - \theta_t)^{k-1-j} B_{k j}$$

social effects

with $\theta_0 = \phi_0$.


$$2. \phi_{t+1} =$$

$$\underbrace{\phi_0}_{\text{exogenous}} + (1 - \phi_0) \sum_{k=0}^{\infty} P_k \sum_{j=0}^k \binom{k}{j} \theta_t^j (1 - \theta_t)^{k-j} B_{k j}$$

social effects


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



73 of 88

Comparison between theory and simulations

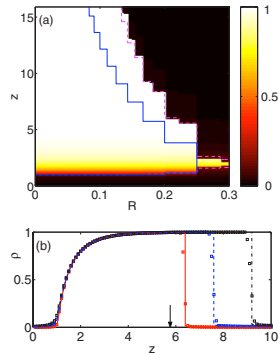


From Gleeson and Cahalane [7]

- ☞ Pure random networks with simple threshold responses
- ☞ $R = \text{uniform threshold (our } \phi_*)$; $z = \text{average degree}$; $\rho = \phi$; $q = \theta$; $N = 10^5$.
- ☞ $\phi_0 = 10^{-3}$, 0.5×10^{-2} , and 10^{-2} .
- ☞ Cascade window is for $\phi_0 = 10^{-2}$ case.
- ☞ Sensible expansion of cascade window as ϕ_0 increases.


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



74 of 88


General fixed point story:

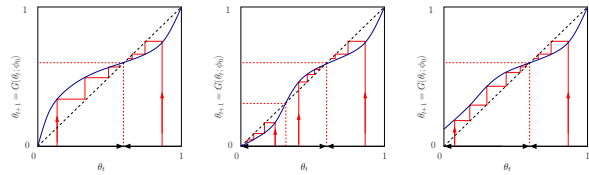

- ☞ Given $\theta_0 (= \phi_0)$, θ_∞ will be the nearest stable fixed point, either above or below.
- ☞ n.b., adjacent fixed points must have opposite stability types.
- ☞ **Important:** Actual form of G depends on ϕ_0 .
- ☞ **Important:** ϕ_t can only increase monotonically so ϕ_0 is at or above an unstable fixed point.
- ☞ First reason: $\phi_1 \geq \phi_0$.
- ☞ Second: $G'(\theta; \phi_0) \geq 0$, $0 \leq \theta \leq 1$.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



77 of 88

Notes:

- ☞ Retrieve cascade condition for spreading from a single seed in limit $\phi_0 \rightarrow 0$.
- ☞ Depends on map $\theta_{t+1} = G(\theta_t; \phi_0)$.
- ☞ First: if self-starters are present, some activation is assured:

$$G(0; \phi_0) = \sum_{k=1}^{\infty} \frac{kP_k}{\langle k \rangle} \bullet B_{k0} > 0.$$

meaning $B_{k0} > 0$ for at least one value of $k \geq 1$.


- ☞ If $\theta = 0$ is a fixed point of G (i.e., $G(0; \phi_0) = 0$) then spreading occurs for a small seed if

$$G'(0; \phi_0) = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \bullet (k-1) \bullet B_{k1} > 1.$$

Insert question from assignment 10 [↗](#)


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



75 of 88

Interesting behavior:




From Gleeson and Cahalane [7]

- ☞ Now allow thresholds to be distributed according to a Gaussian with mean R .
- ☞ $R = 0.2, 0.362$, and 0.38 ; $\sigma = 0.2$.
- ☞ $\phi_0 = 0$ but some nodes have thresholds ≤ 0 so effectively $\phi_0 > 0$.
- ☞ Now see a (nasty) discontinuous phase transition for low $\langle k \rangle$.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



78 of 88

Notes:

In words:


- ☞ If $G(0; \phi_0) > 0$, spreading must occur because some nodes turn on for free.
- ☞ If G has an **unstable fixed point** at $\theta = 0$, then cascades are also always possible.

Non-vanishing seed case:

- ☞ Cascade condition is more complicated for $\phi_0 > 0$.
- ☞ If G has a **stable fixed point** at $\theta = 0$, and an **unstable fixed point** for some $0 < \theta_* < 1$, then for $\theta_0 > \theta_*$, spreading takes off.
- ☞ Tricky point: G depends on ϕ_0 , so as we change ϕ_0 , we also change G .


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



76 of 88

Interesting behavior:

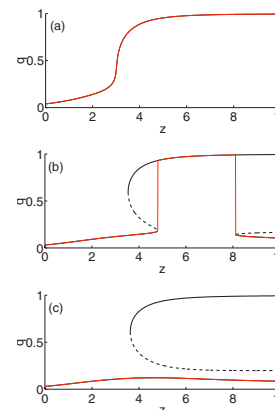


From Gleeson and Cahalane [7]

- ☞ Plots of stability points for $\theta_{t+1} = G(\theta_t; \phi_0)$.
- ☞ n.b.: 0 is not a fixed point here: $\theta_0 = 0$ always takes off.
- ☞ Top to bottom: $R = 0.35, 0.371$, and 0.375 .
- ☞ Saddle node bifurcations appear and merge (b and c).


CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




79 of 88

What's happening:

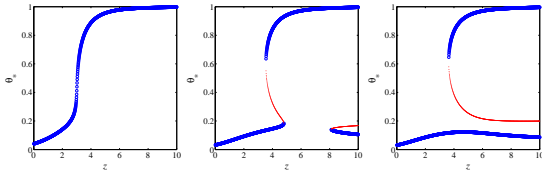


Fixed points slip above and below the $\theta_{t+1} = \theta_t$ line:

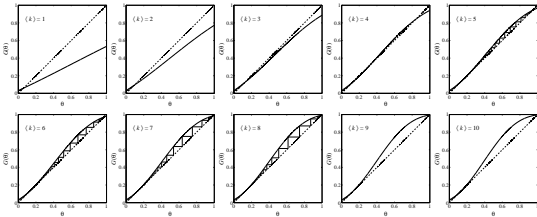

COCO NuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




80 of 88

References I

- [1] S. Bikhchandani, D. Hirshleifer, and I. Welch. A theory of fads, fashion, custom, and cultural change as informational cascades. *J. Polit. Econ.*, 100:992–1026, 1992.
- [2] S. Bikhchandani, D. Hirshleifer, and I. Welch. Learning from the behavior of others: Conformity, fads, and informational cascades. *J. Econ. Perspect.*, 12(3):151–170, 1998. [pdf](#)
- [3] J. M. Carlson and J. Doyle. Highly optimized tolerance: A mechanism for power laws in designed systems. *Phys. Rev. E*, 60(2):1412–1427, 1999. [pdf](#)

COCO NuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



84 of 88

Time-dependent solutions

Synchronous update


Done: Evolution of ϕ_t and θ_t given exactly by the maps we have derived.

Asynchronous updates

- Update nodes with probability α .
- As $\alpha \rightarrow 0$, updates become effectively independent.
- Now can talk about $\phi(t)$ and $\theta(t)$.

COCO NuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




81 of 88

References II

- [4] J. M. Carlson and J. Doyle. Highly optimized tolerance: Robustness and design in complex systems. *Phys. Rev. Lett.*, 84(11):2529–2532, 2000. [pdf](#)
- [5] P. S. Dodds, K. D. Harris, and J. L. Payne. Direct, physically motivated derivation of the contagion condition for spreading processes on generalized random networks. *Phys. Rev. E*, 83:056122, 2011. [pdf](#)
- [6] J. P. Gleeson. Cascades on correlated and modular random networks. *Phys. Rev. E*, 77:046117, 2008. [pdf](#)

COCO NuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




85 of 88

Nutshell:

- Solid dive into understanding contagion on generalized random networks.
- Threshold model leads to idea of vulnerables and a critical mass. [16, 8]
- Generating function approaches provided first breakthroughs and gave possibility and probability of spreading. [10, 16]
- Later: A probabilistic, physical method solved the whole story for a fractional seed—final size, dynamics, ... [7, 6]
- Much can be generalized for more realistic kinds of networks: degree-correlated, modular, bipartite, ...
- The single seed contagion condition and triggering probability can be fully developed using a physical story. [5, 9]
- Many connections to other kinds of models: Voter models, Ising models, ...

COCO NuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References




82 of 88

References III

- [7] J. P. Gleeson and D. J. Cahalane. Seed size strongly affects cascades on random networks. *Phys. Rev. E*, 75:056103, 2007. [pdf](#)
- [8] M. Granovetter. Threshold models of collective behavior. *Am. J. Sociol.*, 83(6):1420–1443, 1978. [pdf](#)
- [9] K. D. Harris, J. L. Payne, and P. S. Dodds. Direct, physically-motivated derivation of triggering probabilities for contagion processes acting on correlated random networks. <http://arxiv.org/abs/1108.5398>, 2014.

COCO NuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size
References



86 of 88


References IV

- [10] M. E. J. Newman, S. H. Strogatz, and D. J. Watts.
Random graphs with arbitrary degree distributions and their applications.
[Phys. Rev. E](#), 64:026118, 2001. pdf ↗
- [11] T. C. Schelling.
Dynamic models of segregation.
[J. Math. Sociol.](#), 1:143-186, 1971. pdf ↗
- [12] T. C. Schelling.
Hockey helmets, concealed weapons, and daylight saving: A study of binary choices with externalities.
[J. Conflict Resolut.](#), 17:381-428, 1973. pdf ↗
- [13] T. C. Schelling.
Micromotives and Macrobehavior.
Norton, New York, 1978.

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



↶ ↷ ↻ 87 of 88


References V

- [14] D. Sornette.
Critical Phenomena in Natural Sciences.
Springer-Verlag, Berlin, 1st edition, 2003.
- [15] D. J. Watts.
A simple model of global cascades on random networks.
[Proc. Natl. Acad. Sci.](#), 99(9):5766-5771, 2002.
pdf ↗
- [16] D. J. Watts, P. S. Dodds, and M. E. J. Newman.
Identity and search in social networks.
[Science](#), 296:1302-1305, 2002. pdf ↗

CocoNuTS
@networksvox
Contagion

Basic Contagion Models
Global spreading condition
Social Contagion Models
Network version
All-to-all networks
Theory
Spreading possibility
Spreading probability
Physical explanation
Final size

References



↶ ↷ ↻ 88 of 88