

# Random Networks

Last updated: 2023/08/22, 11:48:21 EDT

Principles of Complex Systems, Vols. 1, 2, & 3D  
CSYS/MATH 6701, 6713, & a pretend number,  
2023–2024 | @pocsvox

Prof. Peter Sheridan Dodds | @peterdodds


Computational Story Lab | Vermont Complex Systems Center  
Santa Fe Institute | University of Vermont



Licensed under the [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 License](https://creativecommons.org/licenses/by-nc-sa/3.0/).

- The PoCSverse Random Networks 1 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

## Random network generator for $N = 3$ :

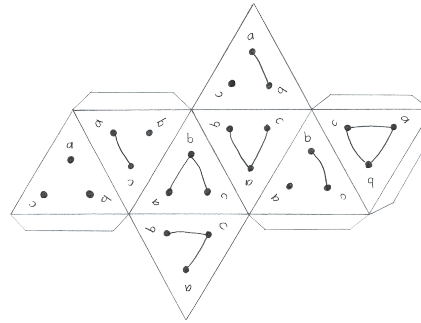

- Get your own exciting generator [here](#)
- As  $N \nearrow$ , polyhedral die rapidly becomes a ball...

## Random networks

### How to build standard random networks:

- Given  $N$  and  $m$ .
- Two probabilistic methods (we'll see a third later on)
  - Connect each of the  $\binom{N}{2}$  pairs with appropriate probability  $p$ .
    - Useful for theoretical work.
  - Take  $N$  nodes and add exactly  $m$  links by selecting edges without replacement.
    - Algorithm: Randomly choose a pair of nodes  $i$  and  $j$ ,  $i \neq j$ , and connect if unconnected; repeat until all  $m$  edges are allocated.
    - Best for adding relatively small numbers of links (most cases).
    - 1 and 2 are effectively equivalent for large  $N$ .

- The PoCSverse Random Networks 5 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

- The PoCSverse Random Networks 10 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

## Outline

### Pure random networks

- Definitions
- How to build theoretically
- Some visual examples
- Clustering
- Degree distributions

### Generalized Random Networks

- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component

### References

- The PoCSverse Random Networks 2 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

## Random networks

### Pure, abstract random networks:

- Consider set of all networks with  $N$  labelled nodes and  $m$  edges.
- Standard random network = one randomly chosen network from this set.
- To be clear: each network is equally probable.
- Sometimes equiprobability is a good assumption, but it is always an assumption.
- Known as Erdős-Rényi random networks or ER graphs.

- The PoCSverse Random Networks 7 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

- The PoCSverse Random Networks 11 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

## Models

### Some important models:

- Generalized random networks;
- Small-world networks;
- Generalized affiliation networks;
- Scale-free networks;
- Statistical generative models ( $p^*$ ).

- The PoCSverse Random Networks 3 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

### Random networks—basic features:

- Number of possible edges:
 
$$0 \leq m \leq \binom{N}{2} = \frac{N(N-1)}{2}$$
- Limit of  $m = 0$ : empty graph.
- Limit of  $m = \binom{N}{2}$ : complete or fully-connected graph.
- Number of possible networks with  $N$  labelled nodes:
 
$$2^{\binom{N}{2}} \sim e^{\frac{\ln 2}{2} N(N-1)}$$
- Given  $m$  edges, there are  $\binom{\binom{N}{2}}{m}$  different possible networks.
- Crazy factorial explosion for  $1 \ll m \ll \binom{N}{2}$ .
- Real world: links are usually costly so real networks are almost always sparse.

## Random networks

### A few more things:

- For method 1, # links is probabilistic:

$$\langle m \rangle = p \binom{N}{2} = p \frac{1}{2} N(N-1)$$

- So the expected or average degree is

$$\langle k \rangle = \frac{2 \langle m \rangle}{N}$$


$$= \frac{2}{N} p \frac{1}{2} N(N-1) = \frac{2}{N} p \frac{1}{2} N(N-1) = p(N-1)$$

- Which is what it should be...
- If we keep  $\langle k \rangle$  constant then  $p \propto 1/N \rightarrow 0$  as  $N \rightarrow \infty$ .


- The PoCSverse Random Networks 8 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

- The PoCSverse Random Networks 14 of 79
  - Pure random networks
  - Definitions
  - How to build theoretically
  - Some visual examples
  - Clustering
  - Degree distributions
- Generalized Random Networks
- Configuration model
- How to build in practice
- Motifs
- Random friends are strange
- Largest component
- References

### Random networks: examples for $N=500$

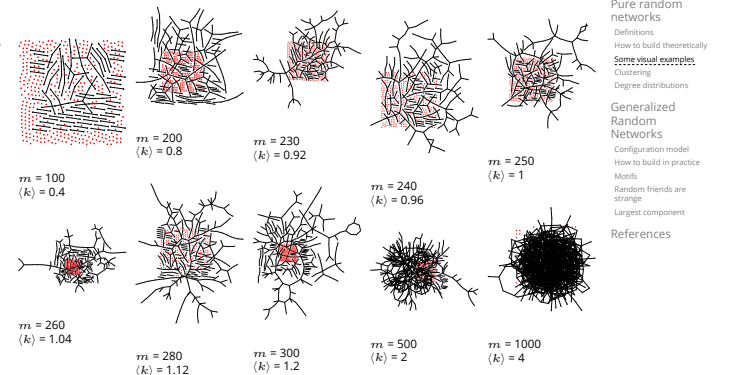

## Random networks: largest components

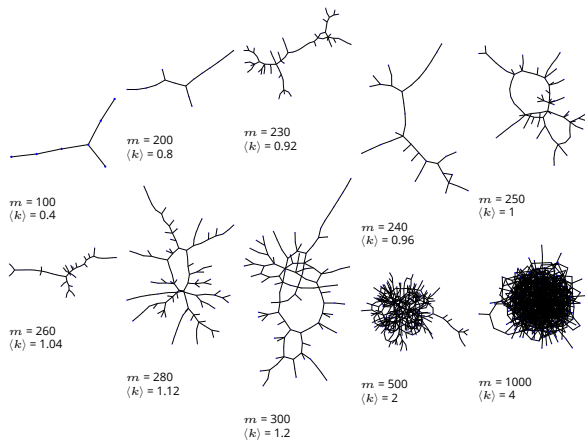

The PoCSverse  
Random  
Networks  
15 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random Friends are  
strange

Largest component

References

## Giant component

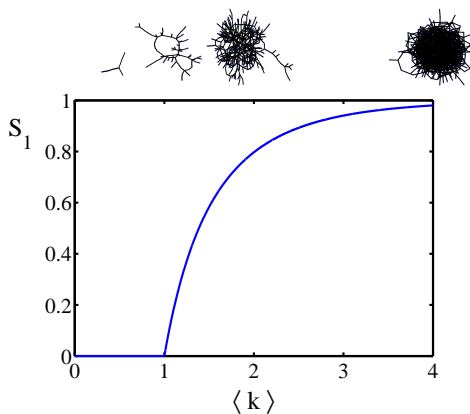

The PoCSverse  
Random  
Networks  
15 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random Friends are  
strange

Largest component

References

## Degree distribution:

- Recall  $P_k$  = probability that a randomly selected node has degree  $k$ .
- Consider method 1 for constructing random networks: each possible link is realized with probability  $p$ .
- Now consider one node: there are ' $N - 1$  choose  $k$ ' ways the node can be connected to  $k$  of the other  $N - 1$  nodes.
- Each connection occurs with probability  $p$ , each non-connection with probability  $(1 - p)$ .
- Therefore have a binomial distribution  $\square$ :

$$P(k; p, N) = \binom{N-1}{k} p^k (1-p)^{N-1-k}$$

The PoCSverse  
Random  
Networks  
23 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random Friends are  
strange

Largest component

References

## Random networks: examples for $N=500$

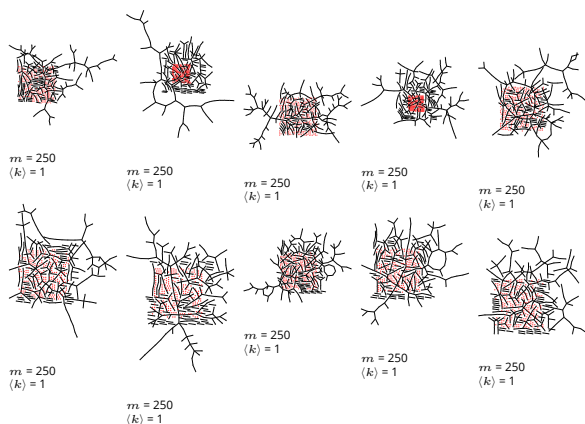

The PoCSverse  
Random  
Networks  
16 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random Friends are  
strange


Largest component

References

## Clustering in random networks:

- For construction method 1, what is the clustering coefficient for a finite network?
- Consider triangle/triple clustering coefficient:  $\square$

$$C_2 = \frac{3 \times \text{\#triangles}}{\text{\#triples}}$$



- Recall:  $C_2$  = probability that two friends of a node are also friends.
- Or:  $C_2$  = probability that a triple is part of a triangle.
- For standard random networks, we have simply that

$$C_2 = p$$

The PoCSverse  
Random  
Networks  
20 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random Friends are  
strange

Largest component

References

## Limiting form of $P(k; p, N)$ :

- Our degree distribution:  $P(k; p, N) = \binom{N-1}{k} p^k (1-p)^{N-1-k}$
- What happens as  $N \rightarrow \infty$ ?
- We must end up with the normal distribution right?
- If  $p$  is fixed, then we would end up with a Gaussian with average degree  $\langle k \rangle \approx pN \rightarrow \infty$ .
- But we want to keep  $\langle k \rangle$  fixed...
- So examine limit of  $P(k; p, N)$  when  $p \rightarrow 0$  and  $N \rightarrow \infty$  with  $\langle k \rangle = p(N-1) = \text{constant}$ .

$$P(k; p, N) \approx \frac{\langle k \rangle^k}{k!} \left(1 - \frac{\langle k \rangle}{N-1}\right)^{N-1-k} \rightarrow \frac{\langle k \rangle^k}{k!} e^{-\langle k \rangle}$$

- This is a Poisson distribution  $\square$  with mean  $\langle k \rangle$ .

The PoCSverse  
Random  
Networks  
24 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random Friends are  
strange

Largest component

References

## Random networks: largest components

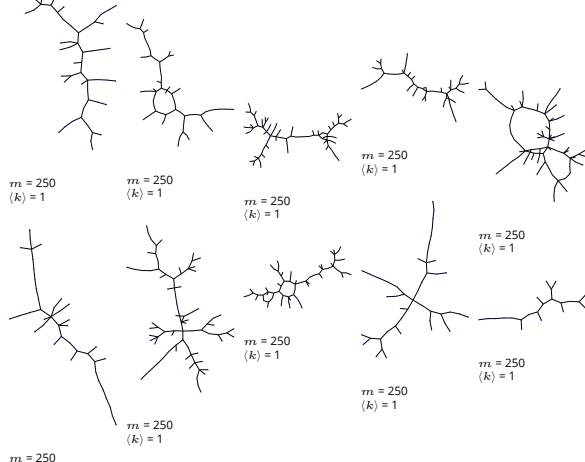

The PoCSverse  
Random  
Networks  
17 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs


Random Friends are  
strange

Largest component

References

## Clustering in random networks:

- So for large random networks ( $N \rightarrow \infty$ ), clustering drops to zero.
- Key structural feature of random networks is that they locally look like pure branching networks
- No small loops.



The PoCSverse  
Random  
Networks  
21 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random Friends are  
strange

Largest component

References

## Poisson basics:

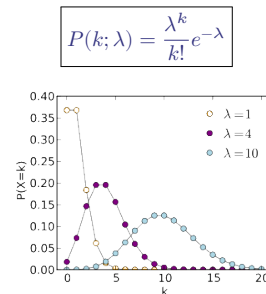

- $\lambda > 0$
- $k = 0, 1, 2, 3, \dots$
- Classic use: probability that an event occurs  $k$  times in a given time period, given an average rate of occurrence.
- e.g.: phone calls/minute, horse-kick deaths.
- 'Law of small numbers'

The PoCSverse  
Random  
Networks  
25 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random Friends are  
strange

Largest component

References

## Poisson basics:

Normalization: we must have

$$\sum_{k=0}^{\infty} P(k; \langle k \rangle) = 1$$

Checking:

$$\begin{aligned} \sum_{k=0}^{\infty} P(k; \langle k \rangle) &= \sum_{k=0}^{\infty} \frac{\langle k \rangle^k}{k!} e^{-\langle k \rangle} \\ &= e^{-\langle k \rangle} \sum_{k=0}^{\infty} \frac{\langle k \rangle^k}{k!} \\ &= e^{-\langle k \rangle} e^{\langle k \rangle} = 1 \end{aligned}$$

The PoCVerse Random Networks 26 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## General random networks

- So... standard random networks have a Poisson degree distribution
- Generalize to arbitrary degree distribution  $P_k$ .
- Also known as the **configuration model**. [7]
- Can generalize construction method from ER random networks.
- Assign each node a weight  $w$  from some distribution  $P_w$  and form links with probability

$$P(\text{link between } i \text{ and } j) \propto w_i w_j.$$

- But we'll be more interested in
  - Randomly wiring up (and rewiring) already existing nodes with fixed degrees.
  - Examining mechanisms that lead to networks with certain degree distributions.

The PoCVerse Random Networks 31 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Models

### Generalized random networks:

- Arbitrary degree distribution  $P_k$ .
- Create (unconnected) nodes with degrees sampled from  $P_k$ .
- Wire nodes together randomly.
- Create ensemble to test deviations from randomness.

The PoCVerse Random Networks 36 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Poisson basics:

Mean degree: we must have

$$\langle k \rangle = \sum_{k=0}^{\infty} k P(k; \langle k \rangle).$$


Checking:

$$\begin{aligned} \sum_{k=0}^{\infty} k P(k; \langle k \rangle) &= \sum_{k=0}^{\infty} k \frac{\langle k \rangle^k}{k!} e^{-\langle k \rangle} \\ &= e^{-\langle k \rangle} \sum_{k=1}^{\infty} \frac{\langle k \rangle^k}{(k-1)!} \\ &= \langle k \rangle e^{-\langle k \rangle} \sum_{k=1}^{\infty} \frac{\langle k \rangle^{k-1}}{(k-1)!} \\ &= \langle k \rangle e^{-\langle k \rangle} \sum_{i=0}^{\infty} \frac{\langle k \rangle^i}{i!} = \langle k \rangle e^{-\langle k \rangle} e^{\langle k \rangle} = \langle k \rangle \end{aligned}$$

In CocoNuTs, we find a different, crazier way of doing this...

The PoCVerse Random Networks 27 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Random networks: examples for $N=1000$

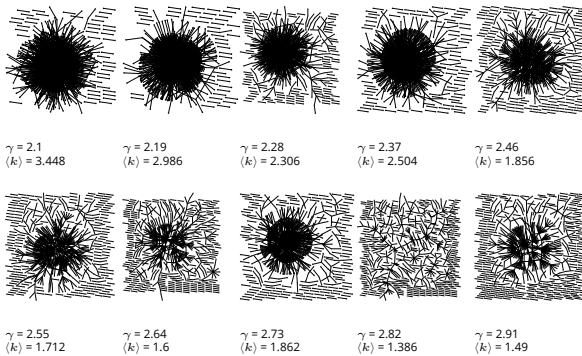


The PoCVerse Random Networks 33 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Building random networks: Stubs

### Phase 1:

**Idea:** start with a soup of unconnected nodes with stubs (half-edges):

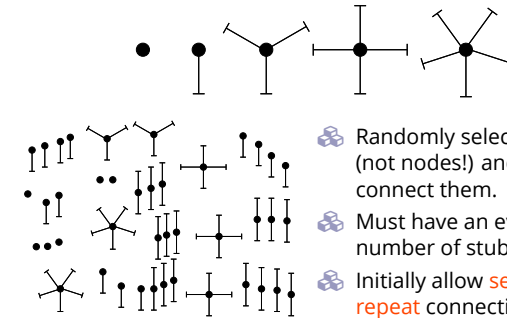

- Randomly select stubs (not nodes!) and connect them.
- Must have an even number of stubs.
- Initially allow **self-** and **repeat** connections.

The PoCVerse Random Networks 37 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Poisson basics:

- The **variance** of degree distributions for random networks turns out to be **very important**.
- Using calculation similar to one for finding  $\langle k \rangle$  we find the **second moment** to be:

$$\langle k^2 \rangle = \langle k \rangle^2 + \langle k \rangle.$$


Variance is then

$$\sigma^2 = \langle k^2 \rangle - \langle k \rangle^2 = \langle k \rangle^2 + \langle k \rangle - \langle k \rangle^2 = \langle k \rangle.$$

- So standard deviation  $\sigma$  is equal to  $\sqrt{\langle k \rangle}$ .
- Note: This is a special property of Poisson distribution and can trip us up...

The PoCVerse Random Networks 28 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Random networks: largest components

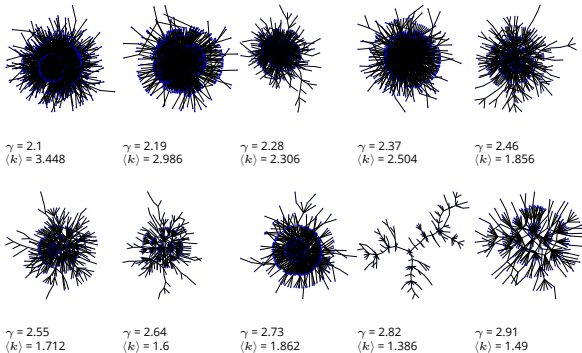


The PoCVerse Random Networks 34 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## Building random networks: First rewiring

### Phase 2:


Now find any (A) self-loops and (B) repeat edges and **randomly rewire** them.



- Being careful: we can't change the degree of any node, so we can't simply move links around.
- Simplest solution:** randomly rewire **two edges** at a time.

The PoCVerse Random Networks 38 of 79  
Pure random networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized Random Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are strange  
Largest component  
References

## General random rewiring algorithm

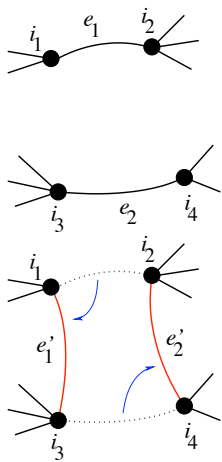

- Randomly choose **two edges**. (Or choose problem edge and a random edge)
- Check to make sure edges are **disjoint**.
- Rewire one end of each edge.
- Node degrees **do not change**.
- Works if  $e_1$  is a self-loop or repeated edge.
- Same as finding on/off/on/off 4-cycles. and rotating them.

The PoCSverse  
Random  
Networks  
39 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Sampling random networks

- What if we have  $P_k$  instead of  $N_k$ ?
- Must now create nodes before start of the construction algorithm.
- Generate  $N$  nodes by sampling from degree distribution  $P_k$ .
- Easy to do exactly numerically since  $k$  is discrete.
- Note:** not all  $P_k$  will always give nodes that can be wired together.

The PoCSverse  
Random  
Networks  
42 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random friends are  
strange

Largest component

References

## Network motifs

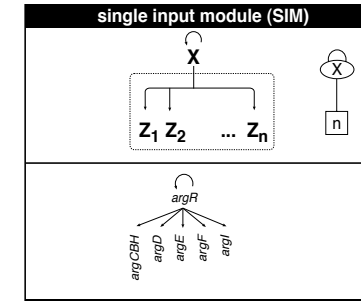

- Master switch.

The PoCSverse  
Random  
Networks  
46 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Sampling random networks

### Phase 2:

- Use rewiring algorithm to remove all self and repeat loops.

### Phase 3:

- Randomize network** wiring by applying rewiring algorithm liberally.
- Rule of thumb: # Rewirings  $\approx 10 \times$  # edges [5].

The PoCSverse  
Random  
Networks  
40 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Network motifs

- Idea of **motifs** [8] introduced by Shen-Orr, Alon et al. in 2002.
- Looked at gene expression within full context of **transcriptional regulation networks**.
- Specific example of Escherichia coli.
- Directed network with 577 interactions (edges) and 424 operons (nodes).
- Used network randomization to produce ensemble of alternate networks with same degree frequency  $N_k$ .
- Looked for **certain subnetworks (motifs)** that appeared more or less often than expected

The PoCSverse  
Random  
Networks  
44 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random friends are  
strange

Largest component

References

## Network motifs

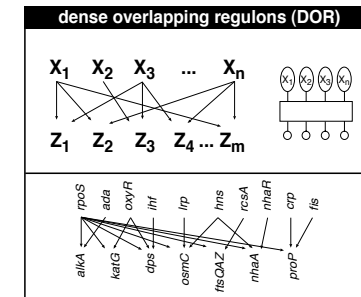

The PoCSverse  
Random  
Networks  
47 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs


Random friends are  
strange

Largest component

References

## Random sampling

- Problem with only joining up stubs is **failure** to randomly sample from all possible networks.
- Example from Milo et al. (2003) [5]:

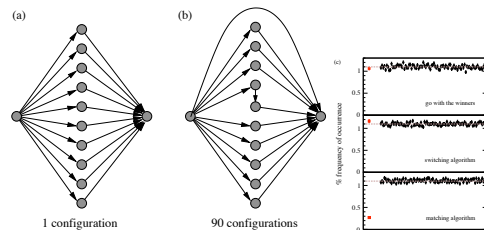

The PoCSverse  
Random  
Networks  
41 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random friends are  
strange


Largest component

References

## Network motifs



- $Z$  only turns on in response to sustained activity in  $X$ .
- Turning off  $X$  rapidly turns off  $Z$ .
- Analogy to elevator doors.



The PoCSverse  
Random  
Networks  
45 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Network motifs

- Note:** selection of motifs to test is reasonable but nevertheless ad-hoc.
- For more, see work carried out by Wiggins *et al.* at Columbia.

The PoCSverse  
Random  
Networks  
48 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## The edge-degree distribution:

- The degree distribution  $P_k$  is fundamental for our description of many complex networks
- Again:  $P_k$  is the degree of **randomly chosen node**.
- A second very important distribution arises from choosing randomly on edges rather than on nodes.
- Define  $Q_k$  to be the probability the node at a **random end of a randomly chosen edge** has degree  $k$ .
- Now choosing nodes based on their degree (i.e., size):

$$Q_k \propto kP_k$$

- Normalized form:

$$Q_k = \frac{kP_k}{\sum_{k'=0}^{\infty} k'P_{k'}} = \frac{kP_k}{\langle k \rangle}$$

- Big deal:** Rich-get-richer mechanism is built into this selection process.

The PoCSverse  
Random  
Networks  
51 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

## The edge-degree distribution:

- Given  $R_k$  is the probability that a friend has  $k$  other friends, then the average number of **friends' other friends** is

$$\begin{aligned} \langle k \rangle_R &= \sum_{k=0}^{\infty} kR_k = \sum_{k=0}^{\infty} k \frac{(k+1)P_{k+1}}{\langle k \rangle} \\ &= \frac{1}{\langle k \rangle} \sum_{k=1}^{\infty} k(k+1)P_{k+1} \\ &= \frac{1}{\langle k \rangle} \sum_{k=1}^{\infty} ((k+1)^2 - (k+1)) P_{k+1} \\ &\text{(where we have sneakily matched up indices)} \\ &= \frac{1}{\langle k \rangle} \sum_{j=0}^{\infty} (j^2 - j) P_j \quad (\text{using } j = k+1) \\ &= \frac{1}{\langle k \rangle} (\langle k^2 \rangle - \langle k \rangle) \end{aligned}$$

The PoCSverse  
Random  
Networks  
54 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

## Two reasons why this matters

### Reason #1:

- Average # friends of friends per node is

$$\langle k_2 \rangle = \langle k \rangle \times \langle k \rangle_R = \langle k \rangle \frac{1}{\langle k \rangle} (\langle k^2 \rangle - \langle k \rangle) = \langle k^2 \rangle - \langle k \rangle$$

- Key: Average depends on the **1st and 2nd moments** of  $P_k$  and **not just the 1st moment**.

- Three peculiarities:

- We might guess  $\langle k_2 \rangle = \langle k \rangle \langle k \rangle$  but it's actually  $\langle k \rangle \langle k - 1 \rangle$ .
- If  $P_k$  has a **large second moment**, then  $\langle k_2 \rangle$  will be big. (e.g., in the case of a power-law distribution)
- Your friends really are different from you...<sup>[4, 6]</sup>
- See also: class size paradoxes (nod to: Gelman)

The PoCSverse  
Random  
Networks  
57 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

## The edge-degree distribution:

- For networks,  $Q_k$  is also the probability that a friend (neighbor) of a random node has  $k$  friends.
  - Useful variant on  $Q_k$ :
- $R_k$  = probability that a friend of a random node has  $k$  other friends.

$$R_k = \frac{(k+1)P_{k+1}}{\sum_{k'=0}^{\infty} (k'+1)P_{k'+1}} = \frac{(k+1)P_{k+1}}{\langle k \rangle}$$

- Equivalent to friend having degree  $k+1$ .
- Natural question:** what's the expected number of other friends that one friend has?

The PoCSverse  
Random  
Networks  
52 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

## The edge-degree distribution:

- Note: our result,  $\langle k \rangle_R = \frac{1}{\langle k \rangle} (\langle k(k-1) \rangle)$ , is true for **all random networks, independent of degree distribution**.
- For standard random networks, recall

$$\langle k^2 \rangle = \langle k \rangle^2 + \langle k \rangle$$

- Therefore:

$$\langle k \rangle_R = \frac{1}{\langle k \rangle} (\langle k^2 \rangle + \langle k \rangle - \langle k \rangle) = \langle k \rangle$$

- Again, neatness of results is a special property of the Poisson distribution.
- So friends on average have  $\langle k \rangle$  other friends, and  $\langle k \rangle + 1$  total friends...

The PoCSverse  
Random  
Networks  
55 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

## Two reasons why this matters

### More on peculiarity #3:


- A node's average # of friends:  $\langle k \rangle$
- Friend's average # of friends:  $\frac{\langle k^2 \rangle}{\langle k \rangle}$
- Comparison:

$$\frac{\langle k^2 \rangle}{\langle k \rangle} = \langle k \rangle \frac{\langle k^2 \rangle}{\langle k \rangle^2} = \langle k \rangle \frac{\sigma^2 + \langle k \rangle^2}{\langle k \rangle^2} = \langle k \rangle \left( 1 + \frac{\sigma^2}{\langle k \rangle^2} \right) \geq \langle k \rangle$$

- So only if everyone has the same degree (variance =  $\sigma^2 = 0$ ) can a node be the same as its friends.
- Intuition: For networks, the more connected a node, the more likely it is to be chosen as a friend.

The PoCSverse  
Random  
Networks  
58 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

- Probability of randomly selecting a node of degree  $k$  by choosing from nodes:  $P_1 = 3/7, P_2 = 2/7, P_3 = 1/7, P_6 = 1/7$ .
- Probability of landing on a node of degree  $k$  after randomly selecting an edge and then randomly choosing one direction to travel:  $Q_1 = 3/16, Q_2 = 4/16, Q_3 = 3/16, Q_6 = 6/16$ .
- Probability of finding # outgoing edges =  $k$  after randomly selecting an edge and then randomly choosing one direction to travel:  $R_0 = 3/16, R_1 = 4/16, R_2 = 3/16, R_5 = 6/16$ .



The PoCSverse  
Random  
Networks  
53 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

## The edge-degree distribution:

- In fact,  $R_k$  is rather special for pure random networks ...
- Substituting

$$P_k = \frac{\langle k \rangle^k}{k!} e^{-\langle k \rangle}$$


$$R_k = \frac{(k+1)P_{k+1}}{\langle k \rangle}$$


we have

$$\begin{aligned} R_k &= \frac{(k+1)}{\langle k \rangle} \frac{\langle k \rangle^{(k+1)}}{(k+1)!} e^{-\langle k \rangle} = \frac{(k+1)}{\langle k \rangle} \frac{\langle k \rangle^{(k+1)}}{(k+1)k!} e^{-\langle k \rangle} \\ &= \frac{\langle k \rangle^k}{k!} e^{-\langle k \rangle} \equiv P_k \end{aligned}$$

- #samesies.

The PoCSverse  
Random  
Networks  
56 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References



"Generalized friendship paradox in complex networks: The case of scientific collaboration"   
Eom and Jo,  
Nature Scientific Reports, **4**, 4603, 2014. <sup>[3]</sup>


## Your friends really are monsters #winners!<sup>1</sup>

- Go on, hurt me:** Friends have more coauthors, citations, and publications.
- Other horrific studies:** your connections on Twitter have more followers than you, are happier than you<sup>[1]</sup>, more sexual partners than you, ...
- The hope:** Maybe they have more enemies and diseases too.
- Research possibility: The Frenemy Paradox.

The PoCSverse  
Random  
Networks  
59 of 79  
Pure random  
networks  
Definitions  
How to build theoretically  
Some visual examples  
Clustering  
Degree distributions  
Generalized  
Random  
Networks  
Configuration model  
How to build in practice  
Motifs  
Random friends are  
strange  
Largest component  
References

<sup>1</sup>Some press [here](#)  [MIT Tech Review].

## Related disappointment:



- Nodes see their friends' color choices.
- Which color is more popular?<sup>1</sup>
- Again: thinking in edge space changes everything.

## Structure of random networks

### Giant component:

- A giant component exists if when we follow a random edge, we are likely to hit a node with at least 1 other outgoing edge.
- Equivalently, expect exponential growth in node number as we move out from a random node.
- All of this is the same as requiring  $\langle k \rangle_R > 1$ .
- Giant component condition (or percolation condition):

$$\langle k \rangle_R = \frac{\langle k^2 \rangle - \langle k \rangle}{\langle k \rangle} > 1$$

- Again, see that the second moment is an essential part of the story.
- Equivalent statement:  $\langle k^2 \rangle > 2\langle k \rangle$

## Global spreading condition

- Our global spreading condition is then:

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} > 1.$$

- Case 1—Rampant spreading: If  $B_{k1} = 1$  then

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) = \frac{\langle k(k-1) \rangle}{\langle k \rangle} > 1.$$

- Good: This is just our giant component condition again.

<sup>1</sup><https://www.washingtonpost.com/graphics/business/wonkblog/majority-illusion/>


## Two reasons why this matters

### (Big) Reason #2:

- $\langle k \rangle_R$  is key to understanding how well random networks are connected together.
- e.g., we'd like to know what's the size of the largest component within a network.
- As  $N \rightarrow \infty$ , does our network have a giant component?
- Defn: Component = connected subnetwork of nodes such that  $\exists$  path between each pair of nodes in the subnetwork, and no node outside of the subnetwork is connected to it.
- Defn: Giant component = component that comprises a non-zero fraction of a network as  $N \rightarrow \infty$ .
- Note: Component = Cluster

## Spreading on Random Networks

- For random networks, we know local structure is pure branching.
- Successful spreading is  $\therefore$  contingent on single edges infecting nodes.

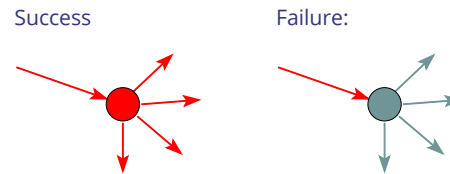

- Focus on binary case with edges and nodes either infected or not.
- First big question: for a given network and contagion process, can global spreading from a single seed occur?

## Global spreading condition


- Case 2—Simple disease-like: If  $B_{k1} = \beta < 1$  then

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot \beta > 1.$$

- A fraction  $(1-\beta)$  of edges do not transmit infection.
- Analogous phase transition to giant component case but critical value of  $\langle k \rangle$  is increased.
- Aka bond percolation.
- Resulting degree distribution  $\tilde{P}_k$ :

$$\tilde{P}_k = \beta^k \sum_{i=k}^{\infty} \binom{i}{k} (1-\beta)^{i-k} P_i.$$

## Giant component

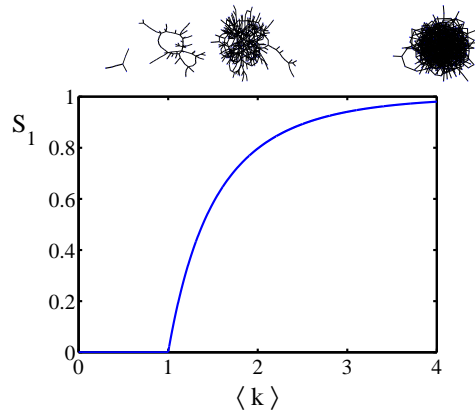

## Global spreading condition

- We need to find: [2]
- $R$  = the average # of infected edges that one random infected edge brings about.
- Call  $R$  the gain ratio.
- Define  $B_{k1}$  as the probability that a node of degree  $k$  is infected by a single infected edge.

$$R = \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot (k-1) \cdot B_{k1} + \sum_{k=0}^{\infty} \frac{kP_k}{\langle k \rangle} \cdot 0 \cdot (1-B_{k1})$$

prob. of connecting to a degree  $k$  node      # outgoing infected edges      Prob. of infection  
 # outgoing infected edges      Prob. of no infection

## Giant component for standard random networks:

- Recall  $\langle k^2 \rangle = \langle k \rangle^2 + \langle k \rangle$ .
- Determine condition for giant component:

$$\langle k \rangle_R = \frac{\langle k^2 \rangle - \langle k \rangle}{\langle k \rangle} = \frac{\langle k \rangle^2 + \langle k \rangle - \langle k \rangle}{\langle k \rangle} = \langle k \rangle$$

- Therefore when  $\langle k \rangle > 1$ , standard random networks have a giant component.
- When  $\langle k \rangle < 1$ , all components are finite.
- Fine example of a continuous phase transition.
- We say  $\langle k \rangle = 1$  marks the critical point of the system.

## Random networks with skewed $P_k$ :

e.g, if  $P_k = ck^{-\gamma}$  with  $2 < \gamma < 3$ ,  $k \geq 1$ , then

$$\langle k^2 \rangle = c \sum_{k=1}^{\infty} k^2 k^{-\gamma}$$

$$\sim \int_{x=1}^{\infty} x^{2-\gamma} dx$$

$$\propto x^{3-\gamma} \Big|_{x=1}^{\infty} = \infty \quad (\gg \langle k \rangle).$$

- So giant component **always exists** for these kinds of networks.
- Cutoff scaling is  $k^{-3}$ : if  $\gamma > 3$  then we have to look harder at  $\langle k \rangle_R$ .
- How about  $P_k = \delta_{kk_0}$ ?

The PoCSverse  
Random  
Networks  
70 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Giant component

We can figure out some limits and details for  $S_1 = 1 - e^{-(k)} S_1$ .

First, we can write  $\langle k \rangle$  in terms of  $S_1$ :

$$\langle k \rangle = \frac{1}{S_1} \ln \frac{1}{1 - S_1}.$$

- As  $\langle k \rangle \rightarrow 0$ ,  $S_1 \rightarrow 0$ .
- As  $\langle k \rangle \rightarrow \infty$ ,  $S_1 \rightarrow 1$ .
- Notice that at  $\langle k \rangle = 1$ , the critical point,  $S_1 = 0$ .
- Only solvable for  $S_1 > 0$  when  $\langle k \rangle > 1$ .
- Really a transcritical bifurcation.<sup>[9]</sup>

The PoCSverse  
Random  
Networks  
73 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## References I

- J. Bollen, B. Gonçalves, I. van de Leemput, and G. Ruan. The happiness paradox: Your friends are happier than you. [EPJ Data Science, 6:4, 2017. pdf](#)
- P. S. Dodds, K. D. Harris, and J. L. Payne. Direct, physically motivated derivation of the contagion condition for spreading processes on generalized random networks. [Phys. Rev. E, 83:056122, 2011. pdf](#)
- Y.-H. Eom and H.-H. Jo. Generalized friendship paradox in complex networks: The case of scientific collaboration. [Nature Scientific Reports, 4:4603, 2014. pdf](#)

The PoCSverse  
Random  
Networks  
77 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Giant component

And how big is the largest component?

- Define  $S_1$  as the **size of the largest component**.
- Consider an infinite ER random network with average degree  $\langle k \rangle$ .
- Let's find  $S_1$  with a back-of-the-envelope argument.
- Define  $\delta$  as the probability that a randomly chosen node **does not** belong to the largest component.
- Simple connection:  $\delta = 1 - S_1$ .
- Dirty trick: If a randomly chosen node is not part of the largest component, then none of its neighbors are.
- So

$$\delta = \sum_{k=0}^{\infty} P_k \delta^k$$

Substitute in Poisson distribution...

The PoCSverse  
Random  
Networks  
71 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice


Motifs

Random friends are  
strange

Largest component

References

## Giant component

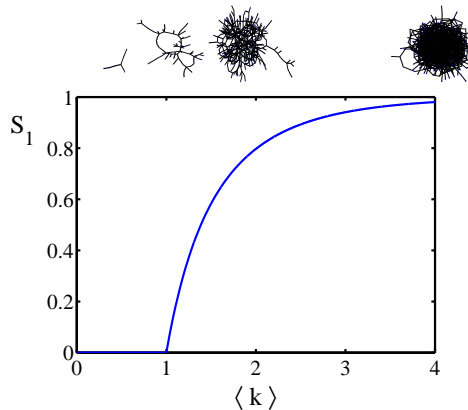

The PoCSverse  
Random  
Networks  
74 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## References II

- S. L. Feld. Why your friends have more friends than you do. [Am. J. of Sociol., 96:1464-1477, 1991. pdf](#)
- R. Milo, N. Kashtan, S. Itzkovitz, M. E. J. Newman, and U. Alon. On the uniform generation of random graphs with prescribed degree sequences, 2003. [pdf](#)
- M. E. J. Newman. Ego-centered networks and the ripple effect. [Social Networks, 25:83-95, 2003. pdf](#)
- M. E. J. Newman. The structure and function of complex networks. [SIAM Rev., 45\(2\):167-256, 2003. pdf](#)

The PoCSverse  
Random  
Networks  
78 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Giant component

Carrying on:

$$\delta = \sum_{k=0}^{\infty} P_k \delta^k = \sum_{k=0}^{\infty} \frac{\langle k \rangle^k}{k!} e^{-(k)} \delta^k$$

$$= e^{-(k)} \sum_{k=0}^{\infty} \frac{(\langle k \rangle \delta)^k}{k!}$$

$$= e^{-(k)} e^{\langle k \rangle \delta} = e^{-(k)(1-\delta)}.$$

Now substitute in  $\delta = 1 - S_1$  and rearrange to obtain:

$$S_1 = 1 - e^{-(k)} S_1.$$

The PoCSverse  
Random  
Networks  
72 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## Turns out we were lucky...

- Our dirty trick **only works for** ER random networks.
- The problem:** We assumed that neighbors have the same probability  $\delta$  of belonging to the largest component.
- But we know our friends are different from us...
- Works for ER random networks because  $\langle k \rangle = \langle k \rangle_R$ .
- We need a separate probability  $\delta'$  for the chance that an edge **leads to** the giant (infinite) component.
- We can sort many things out with **sensible probabilistic arguments...**
- More detailed investigations will profit from a spot of **Generatingfunctionology**.<sup>[10]</sup>
- CocoNuTs: We figure out the final size and complete dynamics.

The PoCSverse  
Random  
Networks  
75 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References

## References III

- S. S. Shen-Orr, R. Milo, S. Mangan, and U. Alon. Network motifs in the transcriptional regulation network of *Escherichia coli*. [Nature Genetics, 31:64-68, 2002. pdf](#)
- S. H. Strogatz. **Nonlinear Dynamics and Chaos**. Addison Wesley, Reading, Massachusetts, 1994.
- H. S. Wilf. **Generatingfunctionology**. A K Peters, Natick, MA, 3rd edition, 2006. [pdf](#)

The PoCSverse  
Random  
Networks  
79 of 79

Pure random  
networks

Definitions

How to build theoretically

Some visual examples

Clustering

Degree distributions

Generalized  
Random  
Networks

Configuration model

How to build in practice

Motifs

Random friends are  
strange

Largest component

References