

# Organizational Networks: Information Exchange and Robustness

Last updated: 2024/11/06, 17:12:47 MST

Principles of Complex Systems, Vols. 1, 2, & 3D  
CSYS/MATH 6701, 6713, & a pretend number, 2024–2025

Prof. Peter Sheridan Dodds

Computational Story Lab | Vermont Complex Systems Center  
Santa Fe Institute | University of Vermont

 Licensed under the [Creative Commons Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

The PoCSverse  
Organizational  
Networks  
1 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## February, 1997:

Aisin (eye-sheen), maker of brake valve parts for Toyota, burns to ground.<sup>[4]</sup>

- 4 hours supply (“just in time”).
- 14,000 cars per day → 0 cars per day.
- 6 months before new machines would arrive.
- Recovered in 5 days.
- Case study performed by Nishiguchi and Beaudet<sup>[4]</sup> “Fractal Design: Self-organizing Links in Supply Chain” in “Knowledge Creation: A New Source of Value”

The PoCSverse  
Organizational  
Networks  
8 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References



The PoCSverse  
Organizational  
Networks  
11 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## Outline

### Overview

- Toyota
- Ambiguous problems
- Models of organizations:

### Modelification

- Goals
- Model
- Testing
- Results

### Conclusion

### References

The PoCSverse  
Organizational  
Networks  
2 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## February, 1997:

Some details:

- 36 suppliers, 150 subcontractors
- 50 supply lines
- Sewing machine maker with no experience in car parts spent about 500 man hours refitting a milling machine to produce 40 valves a day.
- Recovery depended on horizontal links which arguably provided:
  - robustness
  - searchability

The PoCSverse  
Organizational  
Networks  
9 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## Rebirth:



The PoCSverse  
Organizational  
Networks  
12 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## Overview

The basic idea/problem/motivation/history:

- Organizations as information exchange entities.
- Catastrophe recovery.
- Solving ambiguous, ill-defined problems.
- Robustness as ‘optimal’ design feature.

A model of organizational networks:

- Network construction algorithm.
- Task specification.
- Message routing algorithm.

Results:

- Performance measures.

The PoCSverse  
Organizational  
Networks  
6 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## Some things fall apart:



The PoCSverse  
Organizational  
Networks  
10 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

## Motivation

Recovery from catastrophe involves solving problems that are:

- Unanticipated,
- Unprecedented,
- Ambiguous (nothing is obvious),
- Distributed (knowledge/people/resources),
- Limited by existing resources,
- Critical for survival.

Frame:

- Collective solving of ambiguous problems

The PoCSverse  
Organizational  
Networks  
14 of 59  
Overview  
Toyota  
Ambiguous problems  
Models of organizations  
Modelification  
Goals  
Model  
Testing  
Results  
Conclusion  
References

# Motivation

## Ambiguity:

- ☞ Question much less answer is not well understood.
- ☞ Back and forth search process rephrases question.
- ☞ Leads to iterative process of query reformulation.
- ☞ Ambiguous tasks are inherently not decomposable.
- ☞ How do individuals collectively work on an ambiguous organization-scale problem?
- ☞ How do we define ambiguity?

The PoCSverse  
Organizational Networks  
15 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References

# Real organizations—Extremes

## Hierarchy:

- ☞ Maximum efficiency,
- ☞ Suited to static environment,
- ☞ Brittle.

## Market:

- ☞ Resilient,
- ☞ Suited to rapidly changing environment,
- ☞ Requires costless or low cost interactions.

The PoCSverse  
Organizational Networks  
19 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results


Conclusion

References

# Optimal network topologies for local search



“Optimal network topologies for local search with congestion”  
Guimerà et al.,  
Phys. Rev. Lett., **89**, 248701, 2002. [3]

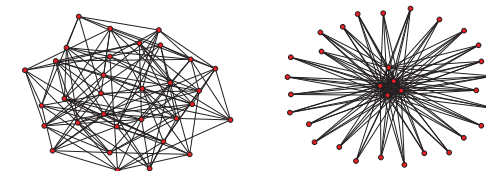

- ☞ Parallel search and congestion.
- ☞ Queueing and network collapse.
- ☞ Exploration of random search mechanisms.

The PoCSverse  
Organizational Networks  
22 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References

# Let's modelify:

## Modeling ambiguous problems is hard...

- ☞ Model response instead...
- ☞ Individuals need novel information and must communicate with others outside of their usual contacts.
- ☞ Creative search is intrinsically inefficient.

The PoCSverse  
Organizational Networks  
16 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References

# Organizations as efficient hierarchies

- ☞ Economics: Organizations ≡ Hierarchies.
- ☞ e.g., Radner (1993) [5], Van Zandt (1998) [7]
- ☞ Hierarchies performing associative operations:



The PoCSverse  
Organizational Networks  
20 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model


Testing

Results

Conclusion

References

# Optimal network topologies for local search



- ☞ Betweenness:  $\beta$ .
- ☞ Polarization:  $\pi = \frac{\max \beta}{\langle \beta \rangle} - 1$ .
- ☞  $L =$  number of links.

- ☞ Goal: minimize average search time.
- ☞ Few searches  $\Rightarrow$  hub-and-spoke network.
- ☞ Many searches  $\Rightarrow$  decentralized network.
- ☞ Phase transition?

The PoCSverse  
Organizational Networks  
23 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References


## Focus on robustness:

1. Avoidance of individual failures.
2. Survival of organization even when failures do occur.

## Why organizations exist:

“The Nature of the Firm”, Ronald H. Coase, *Economica*, **New Series**, **4**, 386–405, 1937. [1]

- ☞ Notion of Transaction Costs
- ☞ More efficient for individuals to cooperate outside of the market.

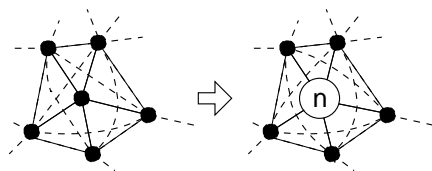

The PoCSverse  
Organizational Networks  
18 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Real organizations...

## But real, complex organizations are in the middle...



“Heterarchy”  
David Stark,  
The Biology of Business: Decoding the Natural Laws of the Enterprise., **New Series**, **4**, 153–, 1999. [6]

The PoCSverse  
Organizational Networks  
21 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References

# Desirable organizational qualities:

1. Low cost (requiring few links).
2. Scalability.
3. Ease of construction—existence is plausible.
4. Searchability.
5. ‘Ultra-robustness’:
  - I Congestion robustness (Resilience to failure due to information exchange);
  - II Connectivity robustness (Recoverability in the event of failure).

The PoCSverse  
Organizational Networks  
25 of 59

Overview

Toyota

Ambiguous problem  
Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References

# Searchability

## Small world problem:

- Can individuals pass a message to a target individual using only personal connections?
- Yes, large scale networks searchable if nodes have identities.
- "Identity and Search in Social Networks," Watts, Dodds, & Newman, 2002. [8]

The PoCSverse  
Organizational Networks  
26 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Model—addition of links

## Team-based networks ( $m = 12$ ):



The PoCSverse  
Organizational Networks  
30 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Model—addition of links

## Core-periphery networks ( $m = 6$ ):



The PoCSverse  
Organizational Networks  
33 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References



"Information exchange and the robustness of organizational networks" [\[2\]](#)  
Dodds, Watts, and Sabel,  
Proc. Natl. Acad. Sci., **100**, 12516–12521, 2003. [2]

Edited by Harrison White [\[3\]](#)

## Formal organizational structure:

### Underlying hierarchy:

- branching ratio  $b$
- depth  $L$
- $N = (b^L - 1)/(b - 1)$  nodes
- $N - 1$  links

### Additional informal ties:

- Choose  $m$  links according to a two parameter probability distribution
- $0 \leq m \leq (N - 1)(N - 2)/2$

The PoCSverse  
Organizational Networks  
28 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Model—addition of links

## Random networks ( $m = 12$ ):

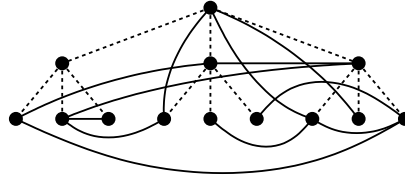

The PoCSverse  
Organizational Networks  
31 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Model—addition of links

## Multiscale networks ( $m = 12$ ):



The PoCSverse  
Organizational Networks  
34 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Model—underlying hierarchy

## Model—formal structure:

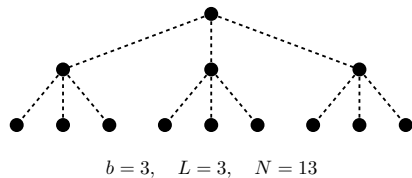

The PoCSverse  
Organizational Networks  
29 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing


Results

Conclusion

References

# Model—addition of links

## Random interdivisional networks ( $m = 6$ ):



The PoCSverse  
Organizational Networks  
32 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model


Testing

Results

Conclusion

References

# Model—construction

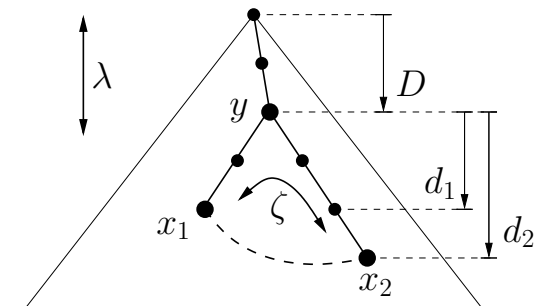

The PoCSverse  
Organizational Networks  
35 of 59

Overview

Toyota

Ambiguous problems

Models of organizations

Modelification

Goals

Model

Testing

Results

Conclusion

References

## Model—construction

- Link addition probability:

$$P(D, d_1, d_2) \propto e^{-D/\lambda} e^{-f(d_1, d_2)/\zeta}$$

- First choose  $(D, d_1, d_2)$ .
- Randomly choose  $(y, x_1, x_2)$  given  $(D, d_1, d_2)$ .
- Choose links without replacement.

## Message passing pattern

- Each of  $T$  time steps, each node generates a message with probability  $\mu$ .
- Recipient of message chosen based on distance from sender.

$$P(\text{recipient at distance } d) \propto e^{-d/\xi}$$

- $\xi = \text{measure of uncertainty}$ ;
- $\xi = 0$ : local message passing;
- $\xi = \infty$ : random message passing.

## Message passing pattern

### Interpretations:

- Sender knows specific recipient.
- Sender requires certain kind of recipient.
- Sender seeks specific information but recipient unknown.
- Sender has a problem but information/recipient unknown.

## Model—construction

### Requirements for $f(d_1, d_2)$ :

- $f \geq 0$  for  $d_1 + d_2 \geq 2$
- $f$  increases monotonically with  $d_1, d_2$ .
- $f(d_1, d_2) = f(d_2, d_1)$ .
- $f$  is maximized when  $d_1 = d_2$ .


### Simple function satisfying 1–4:

$$f(d_1, d_2) = (d_1^2 + d_2^2 - 2)^{1/2}$$

$$\Rightarrow P(y, x_1, x_2) \propto e^{-D/\lambda} e^{-(d_1^2 + d_2^2 - 2)^{1/2}/\zeta}$$

## Message passing pattern:

### Distance $d_{12}$ between two nodes $x_1$ and $x_2$ :



$$d_{12} = \max(d_1, d_2) = 3$$


- Measure unchanged with presence of informal ties.

## Message passing pattern

### Performance:

- Measure Congestion Centrality  $\rho_i$ , fraction of messages passing through node  $i$ .
- Similar to betweenness centrality.
- However: depends on
  - Search algorithm;
  - Task specification  $(\mu, \xi)$ .
- Congestion robustness comes from minimizing  $\rho_{\max}$ .

## Model—limiting cases

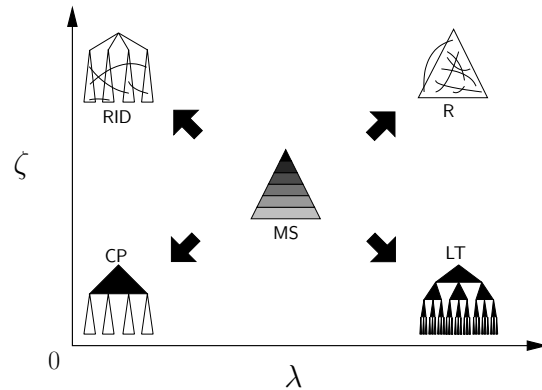

## Message passing pattern

### Simple message routing algorithm:


- Look ahead one step: always choose neighbor closest to recipient node.
- Pseudo-global knowledge:
  - Nodes understand hierarchy.
  - Nodes know only local informal ties.

## Performance testing:

### Parameter settings (unless varying):

- Underlying hierarchy:  $b = 5, L = 6, N = 3096$ ;
- Number of informal ties:  $m = N$ .
- Link addition algorithm:  $\lambda = \zeta = 0.5$ .
- Message passing:  $\xi = 1, \mu = 10/N, T = 1000$ .


## Results—congestion robustness

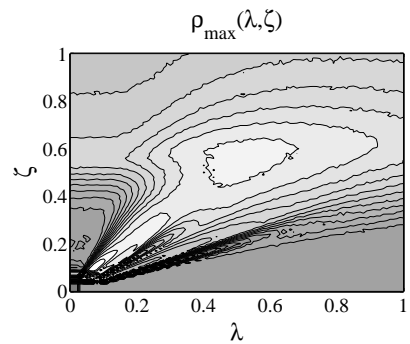


## Results—Maximum firm size

- Congestion may increase with size of network.
- Fix rate of message passing ( $\mu$ ) and Message pattern ( $\xi$ ).
- Fix branching ratio of hierarchy and add more levels.
- Individuals have limited capacity  $\Rightarrow$  limit to firm size.


## Results—Connectivity Robustness

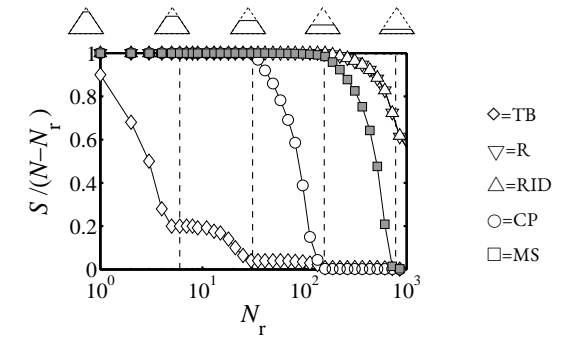

## Results—varying number of links added:

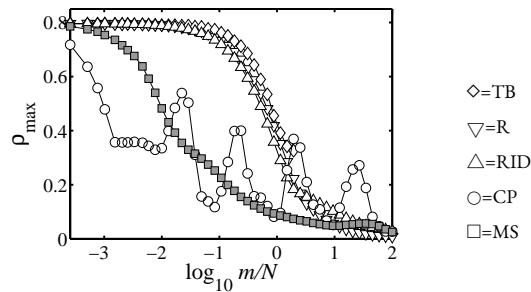


## Scalability in complete uncertainty: $\xi = \infty$

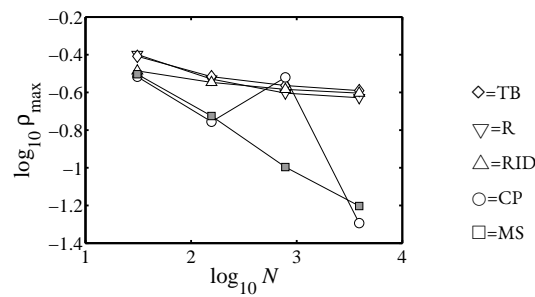

## Summary of results

Feature	Congestion Robustness	Connectivity Robustness	Scalability
Core-periphery	good	average	average
Random	poor	good	poor
Rand. Interdivisional	poor	good	poor
Team-based	poor	poor	poor
Multiscale	good	good	good

## Results—varying message passing pattern

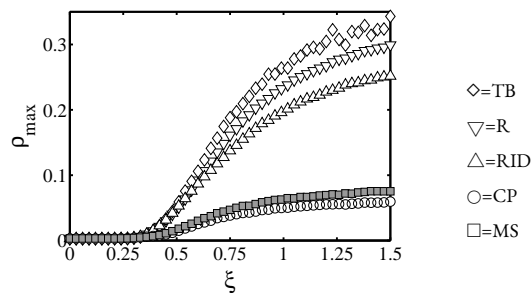

## Connectivity Robustness

### Inducing catastrophic failure:

- Remove  $N_r$  nodes and measure relative size of largest component  $C = S/(N - N_r)$ .
- Four deletion sequences:
  1. Top-down;
  2. Random;
  3. Hub;
  4. Cascading failure.
- Results largely independent of sequence.

## Conclusory moments

### Multi-scale networks:

1. Possess good Congestion Robustness and Connectivity Robustness  $\Rightarrow$  Ultra-robust;
  2. Scalable;
  3. Relatively insensitive to parameter choice;
- Above suggests existence of multi-scale structure is plausible.

## Concluserly moments

- Foregoing is an attempt to model what organizations might look like beyond simple hierarchies (2003).
- Possible work: develop ‘bottom up’ model of organizational networks based on social search, identity (emergent searchability).
- Balance of generalists versus specialists—how many middle managers does an organization need?
- Still a need for data on real organizations...

## References II

- [4] T. Nishiguchi and A. Beaudet.  
Fractal design: Self-organizing links in supply chain.  
In G. Von Krogh, I. Nonaka, and T. Nishiguchi, editors, Knowledge Creation: A New Source of Value, pages 199–230. MacMillan, London, 2000.
- [5] R. Radner.  
The organization of decentralized information processing.  
Econometrica, 61(5):1109–1146, 1993. pdf
- [6] D. Stark.  
Heterarchy.  
In J. Clippinger, editor, The Biology of Business: Decoding the Natural Laws of the Enterprise., chapter 5, pages 153–. Jossey-Bass, San Francisco, 1999. pdf

## References III

- [7] T. Van Zandt.  
Organizations with an endogenous number of information processing agents.  
In Organizations with Incomplete Information, chapter 7. Cambridge University Press, New York, 1998.
- [8] D. J. Watts, P. S. Dodds, and M. E. J. Newman.  
Identity and search in social networks.  
Science, 296:1302–1305, 2002. pdf

## References I

- [1] R. H. Coase.  
The nature of the firm.  
Economica, New Series, 4(4):386–405, 1937. pdf
- [2] P. S. Dodds, D. J. Watts, and C. F. Sabel.  
Information exchange and the robustness of organizational networks.  
Proc. Natl. Acad. Sci., 100(21):12516–12521, 2003. pdf
- [3] R. Guimerà, A. Diaz-Guilera, F. Vega-Redondo, A. Cabrales, and A. A.  
Optimal network topologies for local search with congestion.  
Phys. Rev. Lett., 89:248701, 2002. pdf