

Branching Networks I

Last updated: 2026/03/11, 16:16:59 EDT

DOI:

Principles of Complex Systems, Vols. 1, 2, 3D, 4 Fourever, V for Vendetta

Prof. Peter Sheridan Dodds

Computational Story Lab | Vermont Complex Systems Institute
University of Vermont | Santa Fe Institute



Licensed under the [Creative Commons Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)



These slides are brought to you by:

Sealie & Lambie Productions

The PoCverse
Branching Networks I
2 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law





Nutshell

References



These slides are also brought to you by:

Special Guest Executive Producer



The PoCverse
Branching Networks I
3 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



 On Instagram at [pratchett_the_cat](https://www.instagram.com/pratchett_the_cat) 

Outline

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References

Introduction

Definitions

Allometry

Laws

Stream Ordering


Horton's Laws


Tokunaga's Law

Nutshell

References



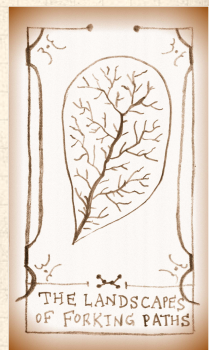

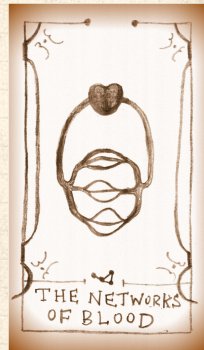



Introduction

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References

Branching networks are useful things:


-  Fundamental to material **supply and collection**
-  **Supply:** From one source to many sinks in 2- or 3-d.
-  **Collection:** From many sources to one sink in 2- or 3-d.
-  Typically observe hierarchical, recursive self-similar structure

Examples:

-  River networks (our focus)
-  Cardiovascular networks
-  Plants
-  Evolutionary trees
-  Organizations (only in theory ...)



Branching networks are everywhere ...

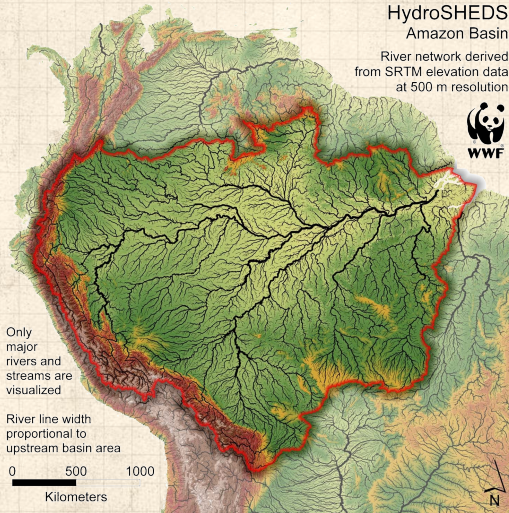

<http://hydrosheds.cr.usgs.gov/>

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



Branching networks are everywhere ...

The PoCverse
Branching Networks I
10 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



<http://en.wikipedia.org/wiki/Image:Applebox.JPG> 




An early thought piece: Extension and Integration




“The Development of Drainage Systems: A Synoptic View” ↗

Waldo S. Glock,


The Geographical Review, **21**, 475–482, 1931. [2]

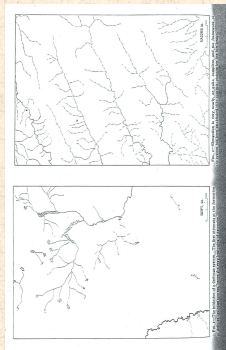

Initiation,
Elongation



Elaboration, Piracy.

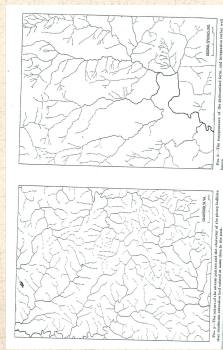

Abstraction,
Absorption.

The PoCVerse
Branching Networks I
11 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References

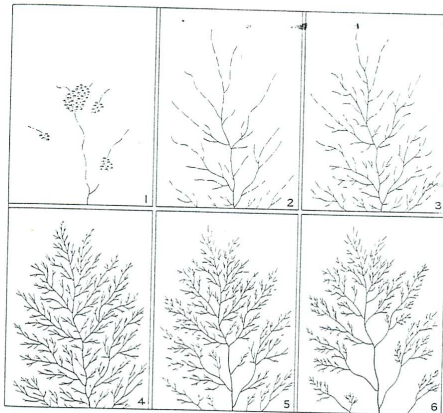


FIG. 8—An ideal diagrammatic summary of the development of a drainage system given for purposes of comparison only. The first four parts show extension, thus: 1, initiation; 2, elongation; 3, elaboration; and 4, maximum extension. Parts 5 and 6 represent steps during integration.

The sequential stages recognized in the evolution of a drainage system are “extension” and “integration”; the first, a stage of increasing complexity; the second, of simplification.



Shaw and Magnasco's beautiful erosion simulations



Unpublished.



Though to be destroyed and lost.



The VHS.

The PoCVerse
Branching Networks I
13 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References




Definitions

-  **Drainage basin** for a point p is the complete region of land from which overland flow drains through p .
-  Definition most sensible for a point in a stream.
-  **Recursive structure:** Basins contain basins and so on.
-  In principle, a drainage basin is defined at every point on a landscape.
-  On flat hillslopes, drainage basins are effectively linear.
-  We treat subsurface and surface flow as following the gradient of the surface.
-  Okay for large-scale networks ...



Basic basin quantities: $a, l, L_{\parallel}, L_{\perp}$:

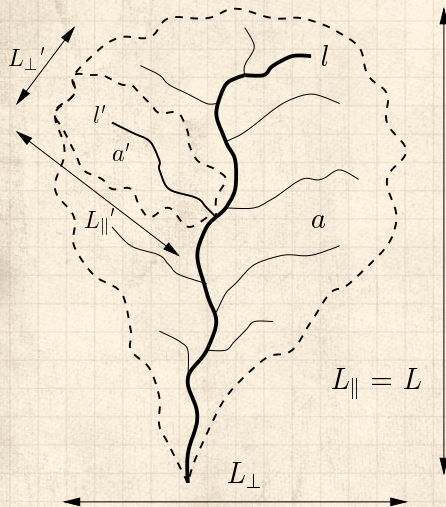

a = drainage basin area



l = length of longest (main) stream (which may be fractal)



$L = L_{\parallel}$ = longitudinal length of basin



$L = L_{\perp}$ = width of basin




Allometry




Isometry:

dimensions scale
linearly with each
other.

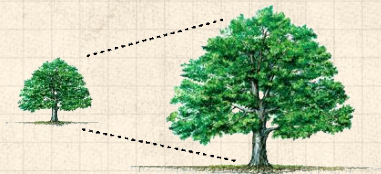


Allometry:

dimensions scale
nonlinearly.



Basin allometry

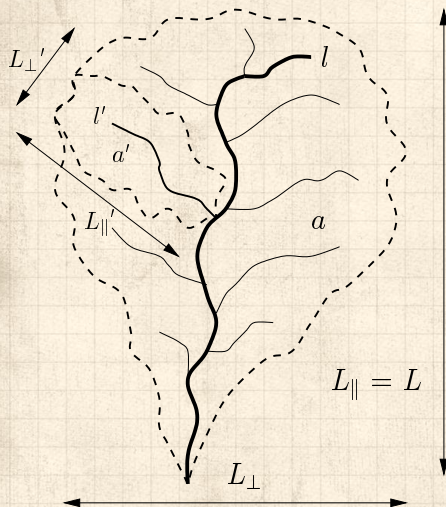

Allometric relationships:



$$\ell \propto a^h$$



$$\ell \propto L^d$$



Combine above:

$$a \propto L^{d/h} \equiv L^D$$



‘Laws’



Hack's law (1957) ^[3]:

$$\ell \propto a^h$$

reportedly $0.5 < h < 0.7$



Scaling of main stream length with basin size:

$$\ell \propto L_{\parallel}^d$$

reportedly $1.0 < d < 1.1$



Basin allometry:

$$L_{\parallel} \propto a^{h/d} \equiv a^{1/D}$$

$D < 2 \rightarrow$ basins elongate.

There are a few more ‘laws’: ^[1]

Relation:	Name or description:
$T_k = T_1(R_T)^{k-1}$	Tokunaga's law
$\ell \sim L^d$	self-affinity of single channels
$n_\omega/n_{\omega+1} = R_n$	Horton's law of stream numbers
$\ell_{\omega+1}/\ell_\omega = R_\ell$	Horton's law of main stream lengths
$\bar{a}_{\omega+1}/\bar{a}_\omega = R_a$	Horton's law of basin areas
$\bar{s}_{\omega+1}/\bar{s}_\omega = R_s$	Horton's law of stream segment lengths
$L_\perp \sim L^H$	scaling of basin widths
$P(a) \sim a^{-\tau}$	probability of basin areas
$P(\ell) \sim \ell^{-\gamma}$	probability of stream lengths
$\ell \sim a^h$	Hack's law
$a \sim L^D$	scaling of basin areas
$\Lambda \sim a^\beta$	Langbein's law
$\lambda \sim L^\varphi$	variation of Langbein's law



Reported parameter values: ^[1]

Parameter:	Real networks:
R_n	3.0–5.0
R_a	3.0–6.0
$R_\ell = R_T$	1.5–3.0
T_1	1.0–1.5
d	1.1 ± 0.01
D	1.8 ± 0.1
h	0.50–0.70
τ	1.43 ± 0.05
γ	1.8 ± 0.1
H	0.75–0.80
β	0.50–0.70
φ	1.05 ± 0.05



Kind of a mess ...

Order of business:

1. Find out how these relationships are connected.
2. Determine most fundamental description.
3. Explain origins of these parameter values

For (3): **Many attempts: not yet sorted out ...**





Stream Ordering:

Method for describing network architecture:

-  Introduced by Horton (1945) ^[4]
-  Modified by Strahler (1957) ^[7]
-  Term: Horton-Strahler Stream Ordering ^[5]
-  Can be seen as **iterative trimming** of a network.



Stream Ordering:

Some definitions:

-  A **channel head** is a point in landscape where flow becomes focused enough to form a stream.
-  A **source stream** is defined as the stream that reaches from a channel head to a junction with another stream.
-  Roughly analogous to capillary vessels.
-  Use symbol $\omega = 1, 2, 3, \dots$ for stream order.




Stream Ordering:



1. Label all **source streams** as **order $\omega = 1$** and remove.
2. Label all **new** source streams as **order $\omega = 2$** and remove.
3. Repeat until one stream is left (order = Ω)
4. Basin is said to be of the order of the last stream removed.
5. Example above is a basin of order $\Omega = 3$.



Stream Ordering—A large example:

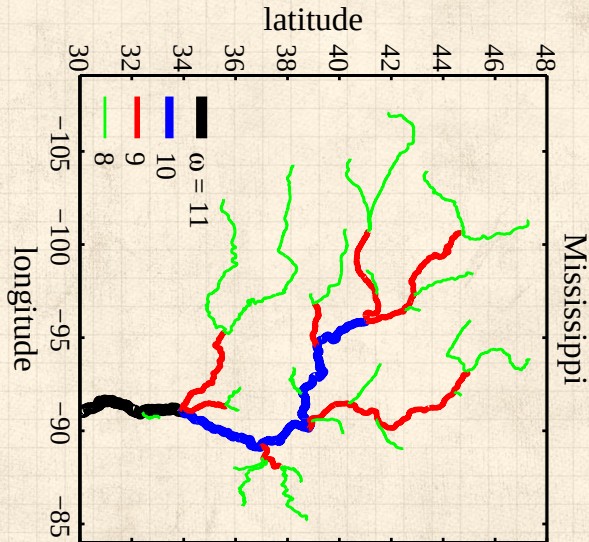

[source=/data6/dodds/work/rivers/dems/mississippi/figures/figorder_paths_mispi10.ps]

[21-Mar-2000 peter dodds]



Stream Ordering:

Another way to define ordering:


- As before, label all **source streams** as **order $\omega = 1$** .
- Follow all labelled streams downstream
- Whenever two streams of the same order (ω) meet, the resulting stream has order incremented by 1 ($\omega + 1$).

- If streams of different orders ω_1 and ω_2 meet, then the resultant stream has order equal to the largest of the two.

- Simple rule:

$$\omega_3 = \max(\omega_1, \omega_2) + \delta_{\omega_1, \omega_2}$$

where δ is the Kronecker delta.



Stream Ordering:

One problem:

- Resolution of data messes with ordering
- Micro-description changes (e.g., order of a basin may increase)
- ...but relationships based on ordering appear to be robust to resolution changes.

Utility:

- Stream ordering helpfully discretizes a network.
- Goal: understand **network architecture**



Basic algorithm for extracting networks from Digital Elevation Models (DEMs):

The PoCSverse
Branching Networks I
32 of 56

Introduction

Definitions

Allometry

Laws






Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



Also:

`/Users/dodds/work/rivers/1998dems/kevinlakewaster.c`



Introduction

Definitions

Allometry

Laws


Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References

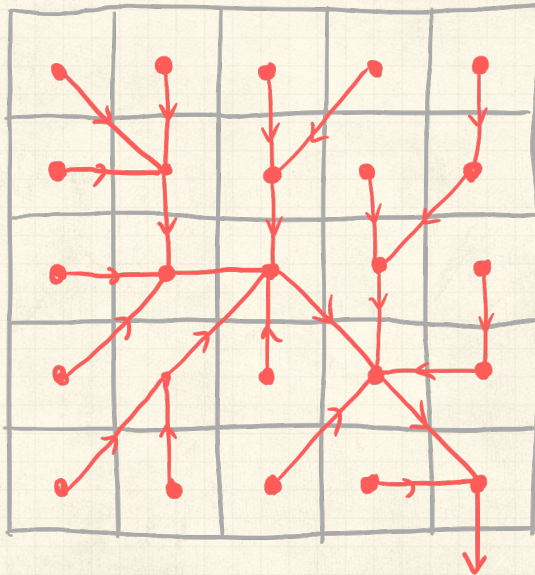

Introduction

Definitions

Allometry

Laws

Stream Ordering


Horton's Laws

Tokunaga's Law


Nutshell

References


stream ordering w :



basin area a :



main stream length l :



Stream Ordering:

Resultant definitions:

 A basin of order Ω has n_ω streams (or sub-basins) of order ω .

 $n_\omega > n_{\omega+1}$

 An order ω basin has **area** a_ω .

 An order ω basin has a **main stream length** ℓ_ω .

 An order ω basin has a **stream segment length** s_ω

1. an order ω stream segment is only that part of the stream which is actually of order ω
2. an order ω stream segment runs from the basin outlet up to the junction of two order $\omega - 1$ streams





THE LAWS OF
BRANCHING

Horton's laws

Self-similarity of river networks

 First quantified by Horton (1945)^[4], expanded by Schumm (1956)^[6]

Three laws:

 Horton's law of stream numbers:

$$n_{\omega}/n_{\omega+1} = R_n > 1$$

 Horton's law of stream lengths:

$$\bar{\ell}_{\omega+1}/\bar{\ell}_{\omega} = R_{\ell} > 1$$

 Horton's law of basin areas:

$$\bar{a}_{\omega+1}/\bar{a}_{\omega} = R_a > 1$$



Horton's Ratios:

 So ...laws are defined by three ratios:

$$R_n, R_\ell, \text{ and } R_a.$$

 Horton's laws describe **exponential decay or growth**:

$$\begin{aligned}n_\omega &= n_{\omega-1}/R_n \\&= n_{\omega-2}/R_n^2 \\&\vdots \\&= n_1/R_n^{\omega-1} \\&= n_1 e^{-(\omega-1)\ln R_n}\end{aligned}$$



Horton's laws

Similar story for area and length:



$$\bar{a}_\omega = \bar{a}_1 e^{(\omega-1)\ln R_a}$$



$$\bar{\ell}_\omega = \bar{\ell}_1 e^{(\omega-1)\ln R_\ell}$$



As stream order increases, **number drops** and **area and length increase**.



Horton's laws

A few more things:

-  Horton's laws are laws of averages.
-  Averaging for number is **across** basins.
-  Averaging for stream lengths and areas is **within** basins.
-  Horton's ratios go a long way to defining a branching network ...
-  But we need one other piece of information ...



Horton's laws

A bonus law:

 Horton's law of stream segment lengths:

$$\bar{s}_{\omega+1}/\bar{s}_{\omega} = R_s > 1$$

 Can show that $R_s = R_{\ell}$.

 Insert assignment question 



Introduction

Definitions

Allometry

Laws




Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



Horton's laws-at-large

The PoCVerse
Branching Networks I
43 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References

Blood networks:

-  Horton's laws hold for sections of cardiovascular networks
-  Measuring such networks is tricky and messy ...
-  Vessel diameters obey an analogous Horton's law.



Data from real blood networks

Network	R_n	R_r	R_ℓ	$-\frac{\ln R_r}{\ln R_n}$	$-\frac{\ln R_\ell}{\ln R_n}$	α
West <i>et al.</i>	–	–	–	1/2	1/3	3/4
rat (PAT)	2.76	1.58	1.60	0.45	0.46	0.73
cat (PAT) ^[11]	3.67	1.71	1.78	0.41	0.44	0.79
dog (PAT)	3.69	1.67	1.52	0.39	0.32	0.90
pig (LCX)	3.57	1.89	2.20	0.50	0.62	0.62
pig (RCA)	3.50	1.81	2.12	0.47	0.60	0.65
pig (LAD)	3.51	1.84	2.02	0.49	0.56	0.65
human (PAT)	3.03	1.60	1.49	0.42	0.36	0.83
human (PAT)	3.36	1.56	1.49	0.37	0.33	0.94



Horton's laws

Observations:

 Horton's ratios vary:

R_n	3.0–5.0
-------	---------

R_a	3.0–6.0
-------	---------

R_ℓ	1.5–3.0
----------	---------

 No accepted explanation for these values.

 Horton's laws tell us how quantities vary from level to level ...

 ...but they don't explain how networks are structured.



Tokunaga's law

Delving deeper into network architecture:

-  Tokunaga (1968) identified a clearer picture of network structure [8, 9, 10]
-  As per Horton-Strahler, use **stream ordering**.
-  **Focus:** describe how streams of different orders connect to each other.
-  Tokunaga's law is also a law of averages.



Definition:

 $T_{\mu,\nu}$ = the average number of **side streams** of **order ν** that enter as tributaries to streams of **order μ**

 $\mu, \nu = 1, 2, 3, \dots$

 $\mu \geq \nu + 1$

 Recall each stream segment of order μ is 'generated' by two streams of order $\mu - 1$

 These generating streams are not considered side streams.



Network Architecture

Tokunaga's law ^[8, 9, 10]

 Property 1: Scale independence—depends only on difference between orders:

$$T_{\mu,\nu} = T_{\mu-\nu}$$

 Property 2: Number of side streams grows exponentially with difference in orders:

$$T_{\mu,\nu} = T_1(R_T)^{\mu-\nu-1}$$

 We usually write Tokunaga's law as:


$$T_k = T_1(R_T)^{k-1} \text{ where } R_T \simeq 2$$



Tokunaga's law—an example:


$$T_1 \simeq 2$$

$$R_T \simeq 4$$

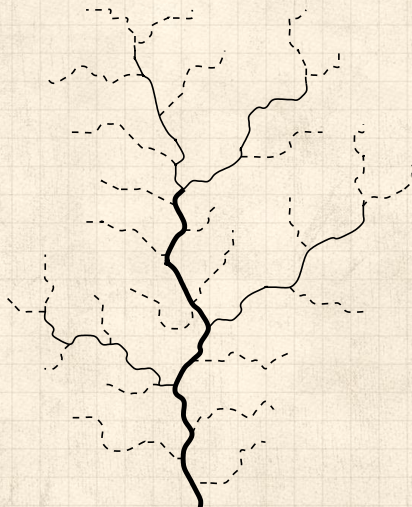

The Mississippi

A Tokunaga graph:

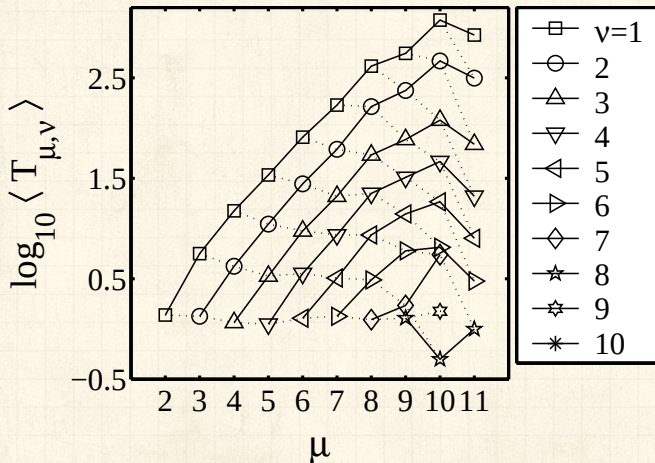

Nutshell:

- Branching networks show remarkable **self-similarity** over many scales.
- There are many interrelated scaling laws.
- Horton-Strahler **Stream ordering** gives one useful way of getting at the architecture of branching networks.
- Horton's laws** reveal self-similarity.
- Horton's laws can be misinterpreted as suggesting a pure hierarchy.
- Tokunaga's laws** neatly describe network architecture.
- Branching networks exhibit a mixed hierarchical structure.
- Horton and Tokunaga can be connected analytically.
- Surprisingly:

$$R_n = \frac{(2 + R_T + T_1) + \sqrt{(2 + R_T + T_1)^2 - 8R_T}}{2}$$



Crafting landscapes—Far Lands or Bust



The PoCverse
Branching Networks I
52 of 56

Introduction

Definitions

Allometry

Laws

Stream Ordering

Horton's Laws

Tokunaga's Law

Nutshell

References



References I

- [1] P. S. Dodds and D. H. Rothman.
Unified view of scaling laws for river networks.
[Physical Review E](#), 59(5):4865–4877, 1999. pdf ↗
- [2] W. S. Glock.
The development of drainage systems: A synoptic view.
[The Geographical Review](#), 21:475–482, 1931. pdf ↗
- [3] J. T. Hack.
Studies of longitudinal stream profiles in Virginia and Maryland.
[United States Geological Survey Professional Paper](#),
294-B:45–97, 1957. pdf ↗



References II

[4] R. E. Horton.

Erosional development of streams and their drainage basins;
hydrophysical approach to quantitative morphology.

Bulletin of the Geological Society of America,
56(3):275–370, 1945. pdf ↗

[5] I. Rodríguez-Iturbe and A. Rinaldo.

Fractal River Basins: Chance and Self-Organization.

Cambridge University Press, Cambridge, UK, 1997.

[6] S. A. Schumm.

Evolution of drainage systems and slopes in badlands at Perth
Amboy, New Jersey.

Bulletin of the Geological Society of America, 67:597–646,
1956. pdf ↗



References III

- [7] A. N. Strahler.
Hypsometric (area altitude) analysis of erosional topography.
Bulletin of the Geological Society of America, 63:1117–1142,
1952.
- [8] E. Tokunaga.
The composition of drainage network in Toyohira River
Basin and the valuation of Horton's first law.
Geophysical Bulletin of Hokkaido University, 15:1–19, 1966.
[pdf](#) 
- [9] E. Tokunaga.
Consideration on the composition of drainage networks and
their evolution.
Geographical Reports of Tokyo Metropolitan University,
13:G1–27, 1978. [pdf](#) 



- [10] E. Tokunaga.
Ordering of divide segments and law of divide segment numbers.
Transactions of the Japanese Geomorphological Union,
5(2):71–77, 1984.
- [11] D. L. Turcotte, J. D. Pelletier, and W. I. Newman.
Networks with side branching in biology.
Journal of Theoretical Biology, 193:577–592, 1998. pdf 

