Applications of Random Networks

Complex Networks, Course 295A, Spring, 2008

Prof. Peter Dodds

Department of Mathematics & Statistics
University of Vermont

Licensed under the *Creative Commons Attribution-NonCommercial-ShareAlike 3.0 License*.

Outline

More on building random networks

- Problem: How much of a real network's structure is non-random?
- Key elephant in the room: the degree distribution P_k.
- First observe departure of P_k from a Poisson distribution.
- Next: measure the departure of a real network with a degree frequency N_k from a random network with the same degree frequency.
- Degree frequency N_k = observed frequency of degrees for a real network.
- What we now need to do: Create an ensemble of random networks with degree frequency N_k and then compare.

Building random networks: Stubs

Phase 1:

- Idea: start with a soup of unconnected nodes with stubs (half-edges):

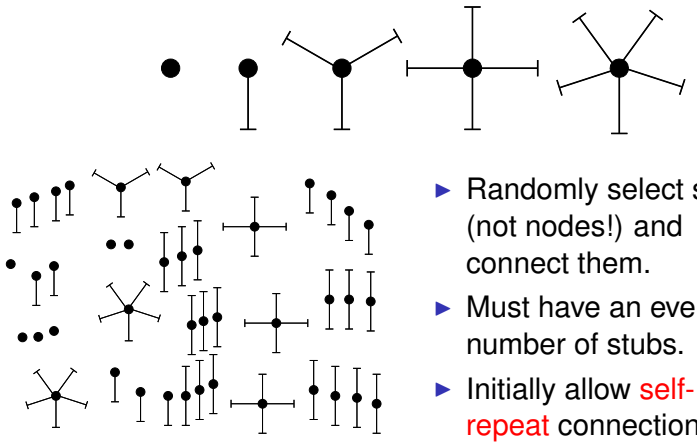

- Randomly select stubs (not nodes!) and connect them.
- Must have an even number of stubs.
- Initially allow self- and repeat connections.

Building random networks: First rewiring

Phase 2:

- Now find any (A) self-loops and (B) repeat edges and randomly rewire them.



- Being careful: we can't change the degree of any node, so we can't simply move links around.
- Simplest solution: randomly rewire two edges at a time.

General random rewiring algorithm

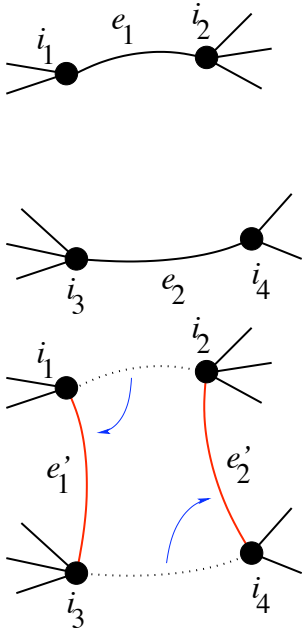

- Randomly choose two edges. (Or choose problem edge and a random edge)
- Check to make sure edges are disjoint.

- Rewire one end of each edge.
- Node degrees do not change.
- Works if e_1 is a self-loop or repeated loop.
- Same as finding on/off/on/off 4-cycles. and rotating them.

Sampling random networks

Phase 2:

- Use rewiring algorithm to remove all self and repeat loops.

Phase 3:

- Randomize network wiring by applying rewiring algorithm liberally.
- Rule of thumb: # Rewirings $\simeq 10 \times$ # edges [1].

Random sampling

- Problem with only joining up stubs is failure to randomly sample from all possible networks.
- Example from Milo et al. (2003) [1]:

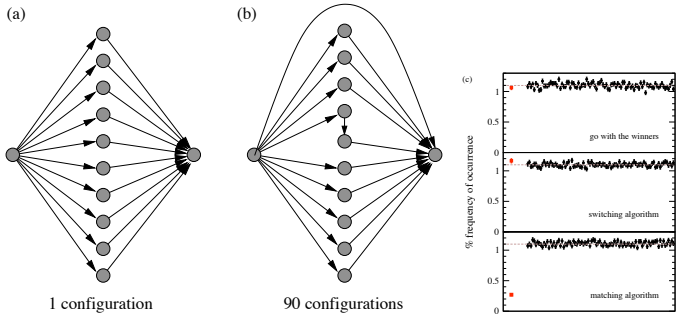

Sampling random networks

- What if we have P_k instead of N_k?
- Must now create nodes before start of the construction algorithm.
- Generate N nodes by sampling from degree distribution P_k.
- Easy to do exactly numerically since k is discrete.
- Note: not all P_k will always give nodes that can be wired together.

Network motifs

- Idea of motifs [2] introduced by Shen-Orr, Alon et al. in 2002.
- Looked at gene expression within full context of transcriptional regulation networks.
- Specific example of Escherichia coli.
- Directed network with 577 interactions (edges) and 424 operons (nodes).
- Used network randomization to produce ensemble of alternate networks with same degree frequency N_k.
- Looked for certain subnetworks (motifs) that appeared more or less often than expected

Network motifs

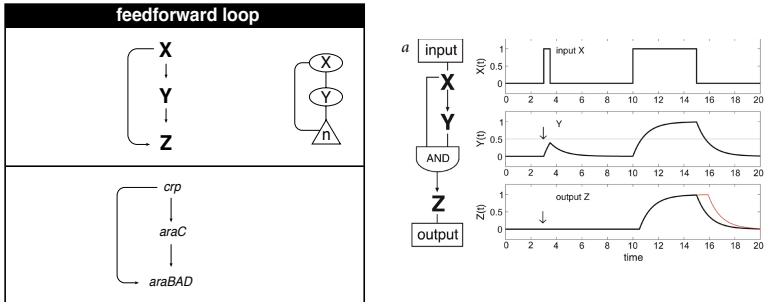

- Z only turns on in response to sustained activity in X.
- Turning of X rapidly turns of Z.
- Analogy to elevator doors.

Network motifs

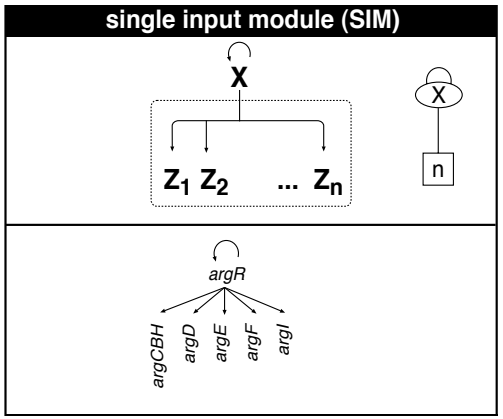

- Master switch.

Network motifs

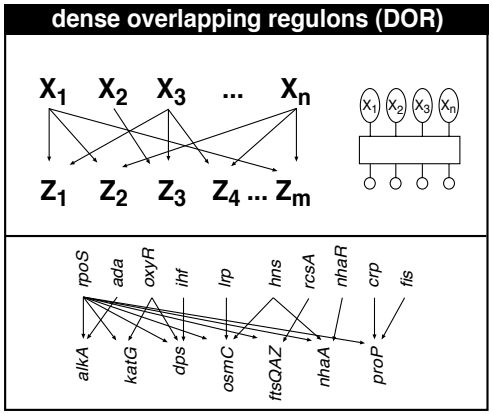

Network motifs

- Note: selection of motifs to test is reasonable but nevertheless ad-hoc.
- For more, see work carried out by Wiggins et al. at Columbia.

References I

R. Milo, N. Kashtan, S. Itzkovitz, M. E. J. Newman, and U. Alon.
On the uniform generation of random graphs with prescribed degree sequences, 2003. pdf (⊞)

S. S. Shen-Orr, R. Milo, S. Mangan, and U. Alon.
Network motifs in the transcriptional regulation network of *Escherichia coli*.
Nature Genetics, pages 64–68, 2002. pdf (⊞)